

BC846x,BC847x,BC848x,BC849x,BC850x SERIES

NPN GENERAL PURPOSE TRANSISTORS

VOLTAGE 30/45/65 Volt **POWER** 330 mWatt

SOT-23

Unit : inch(mm)

FEATURES


- General purpose amplifier applications
- NPN epitaxial silicon, planar design
- Collector current $I_C = 100\text{mA}$
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

MECHANICAL DATA

Case: SOT-23, Plastic

Terminals: Solderable per MIL-STD-750, Method 2026

Approx. Weight: 0.0084 gram

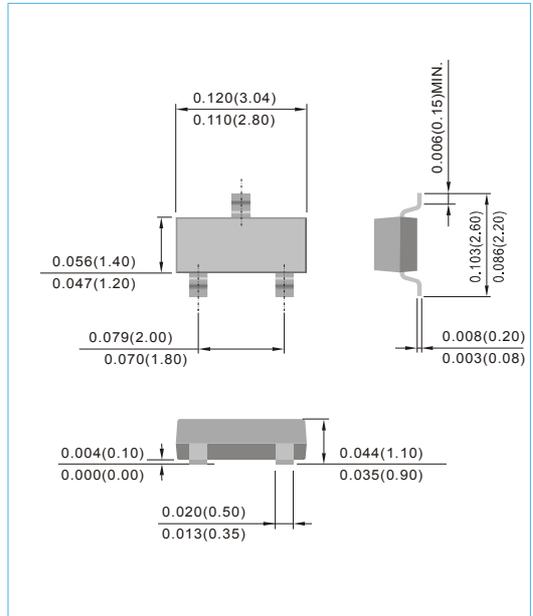

ABSOLUTE RATINGS

Parameter	Symbol	Value	Unit
Collector - Emitter Voltage	V_{CE0}	65	V
		45	
		30	
Collector - Base Voltage	V_{CB0}	80	V
		50	
		30	
Emitter - Base Voltage	V_{EB0}	6	V
		6	
		5	
Collector Current - Continuous	I_C	100	mA
Peak Collector Current	I_{CM}	200	mA

THERMAL CHARACTERISTICS


Parameter	Symbol	Value	Unit
Max Power Dissipation (Note 1)	P_{TOT}	330	mW
Thermal Resistance , Junction to Ambient	$R_{\theta JA}$	375	$^{\circ}\text{C}/\text{W}$
Operating Junction Temperature and Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^{\circ}\text{C}$

Note 1: Mounted on a FR4 PCB, single-sided copper, standard footprint

BC846x,BC847x,BC848x,BC849x,BC850x SERIES

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Test Condition	MIN.	TYP.	MAX.	Unit
Collector - Emitter Breakdown Voltage BC846A/B BC847A/B/C,BC850B/C BC848A/B/C,BC849B/C	$V_{(BR)CEO}$	$I_C=10mA, I_B=0$	65 45 30	-	-	V
Collector - Base Breakdown Voltage BC846A/B BC847A/B/C,BC850B/C BC848A/B/C,BC849B/C	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	80 50 30	-	-	V
Emitter - Base Breakdown Voltage BC846A/B BC847A/B/C,BC850B/C BC848A/B/C,BC849B/C	$V_{(BR)EBO}$	$I_E=1\mu A, I_C=0$	6 6 5	-	-	V
Emitter-Base Cutoff Current	I_{EBO}	$V_{EB}=5$	-	-	100	nA
Collector-Base Cutoff Current	I_{CBO}	$V_{CB}=30V, I_E=0$ $V_{CB}=30V, I_E=0, T_J=150^\circ C$	-	-	15 5	nA μA
DC Current Gain BC846~BC848 Suffix "A" BC846~BC850 Suffix "B" BC847~BC850 Suffix "C"	h_{FE}	$I_C=10\mu A, V_{CE}=5V$	-	90 150 270	-	-
DC Current Gain BC846~BC848 Suffix "A" BC846~BC850 Suffix "B" BC847~BC850 Suffix "C"	h_{FE}	$I_C=2mA, V_{CE}=5V$	110 200 420	180 290 520	220 450 800	-
Collector - Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=10mA, I_B=0.5mA$ $I_C=100mA, I_B=5mA$	-	-	0.25 0.6	V
Base - Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C=10mA, I_B=0.5mA$ $I_C=100mA, I_B=5mA$	-	0.7 0.9	-	V
Base - Emitter Voltage	$V_{BE(ON)}$	$I_C=2mA, V_{CE}=5V$ $I_C=10mA, V_{CE}=5V$	0.58 -	0.66 -	0.70 0.77	V
Collector - Base Capacitance	C_{CBO}	$V_{CB}=10V, I_E=0, f=1MHz$	-	-	4.5	pF

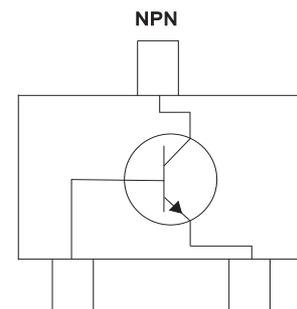

BC846x, BC847x, BC848x, BC849x, BC850x SERIES

ELECTRICAL CHARACTERISTICS CURVE (BC846A, BC847A, BC848A)

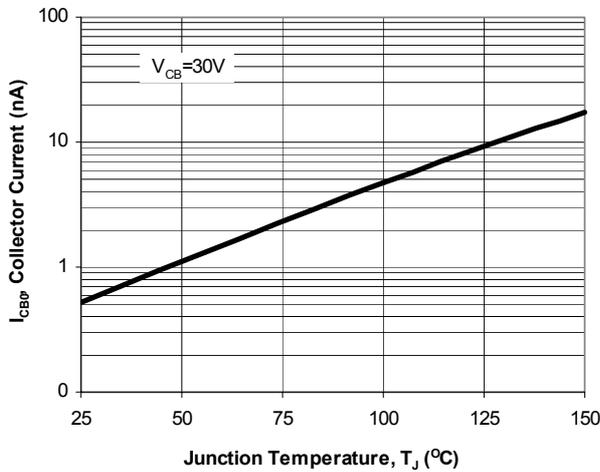


Fig. 1. Typical I_{CB0} vs. Junction Temperature

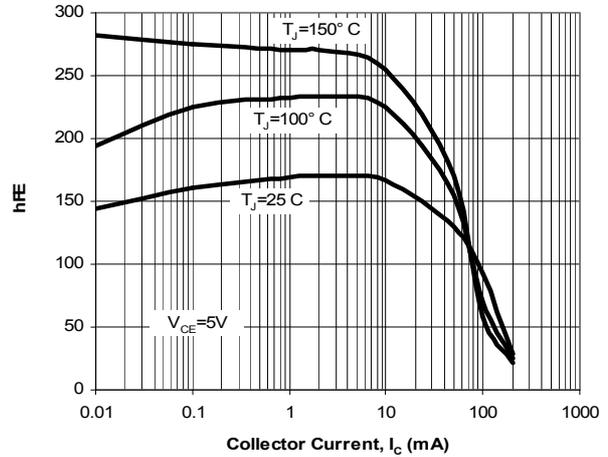


Fig. 2. Typical h_{FE} vs. Collector Current

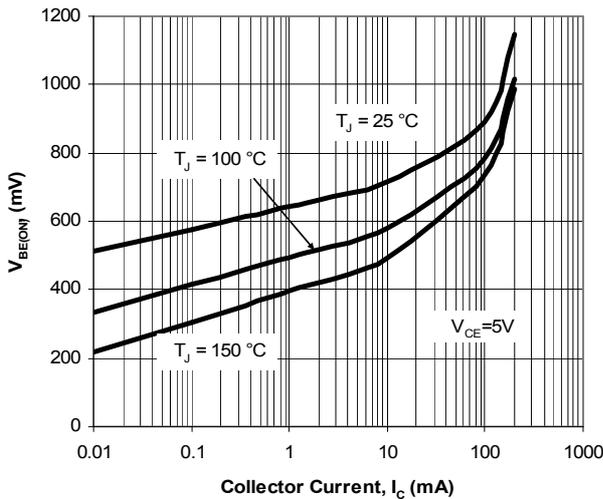


Fig. 3. Typical $V_{BE(ON)}$ vs. Collector Current

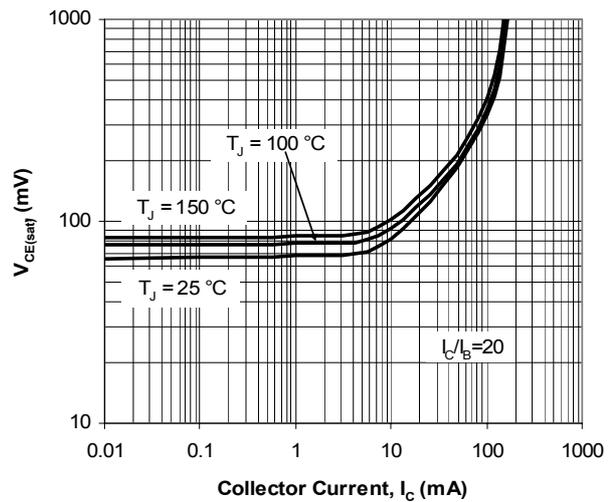


Fig. 4. Typical $V_{CE(SAT)}$ vs. Collector Current

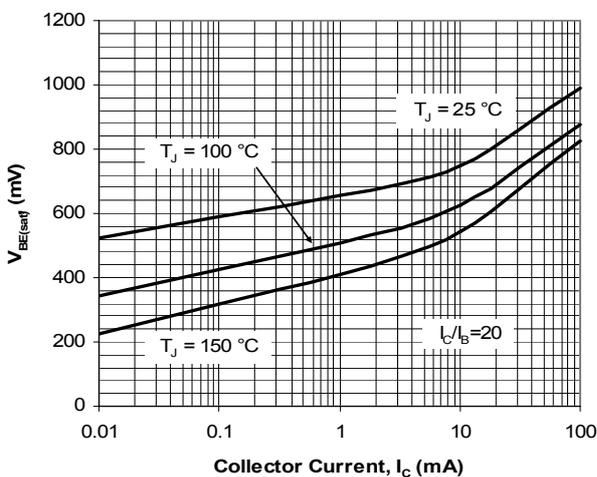


Fig. 5. Typical $V_{BE(SAT)}$ vs. Collector Current







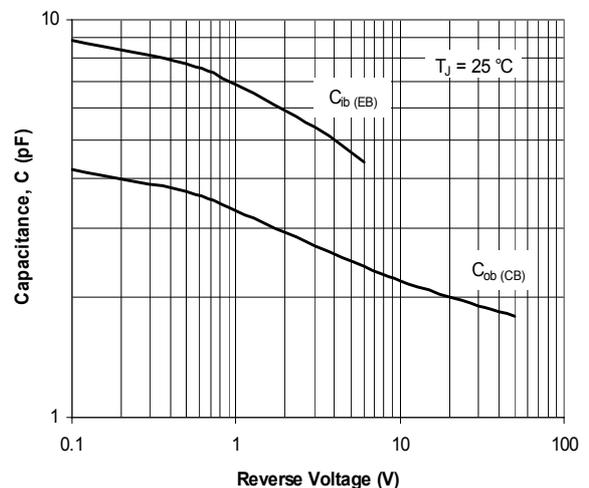


Fig. 6. Typical Capacitances vs. Reverse Voltage







BC846x, BC847x, BC848x, BC849x, BC850x SERIES

ELECTRICAL CHARACTERISTICS CURVE (BC846B, BC847B, BC848B, BC849B, BC850B)

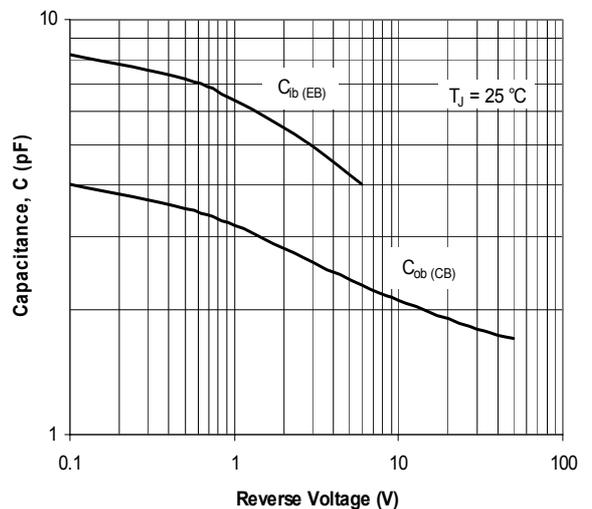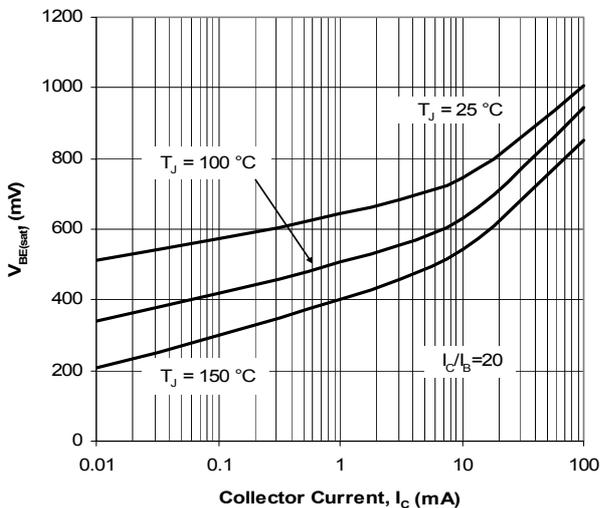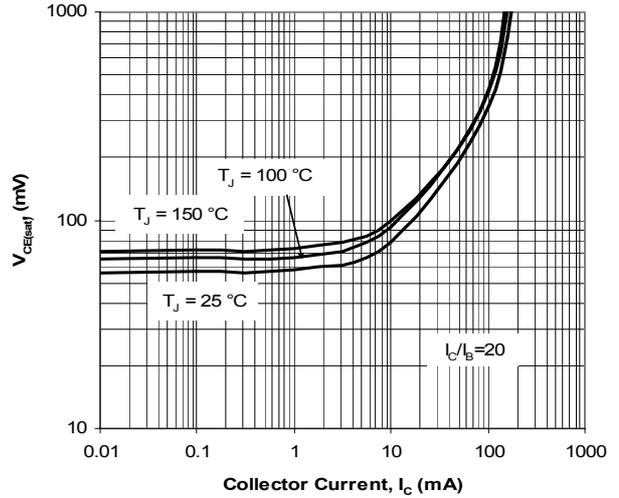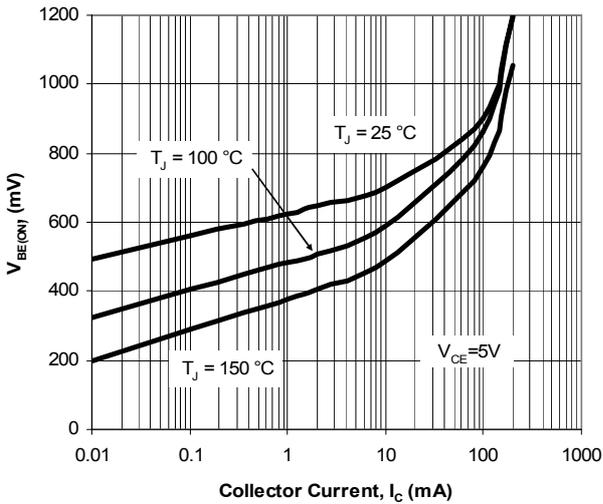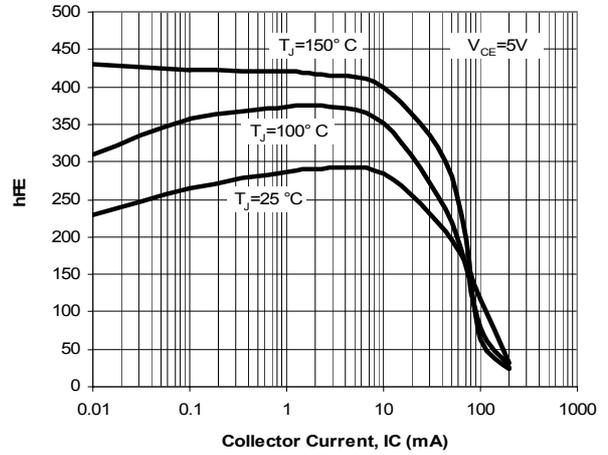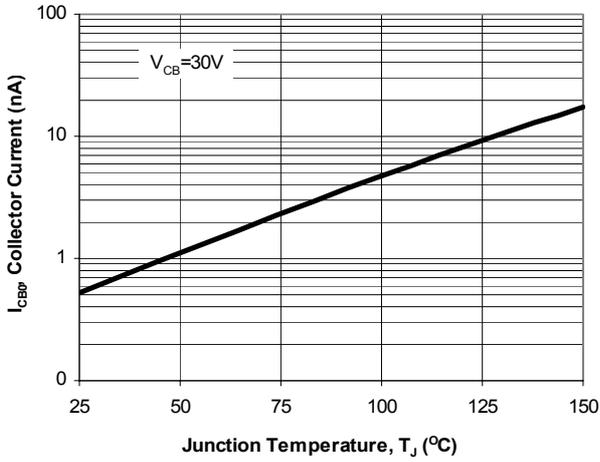

BC846x,BC847x,BC848x,BC849x,BC850x SERIES

ELECTRICAL CHARACTERISTICS CURVE (BC847C,BC848C,BC849C,BC850C)

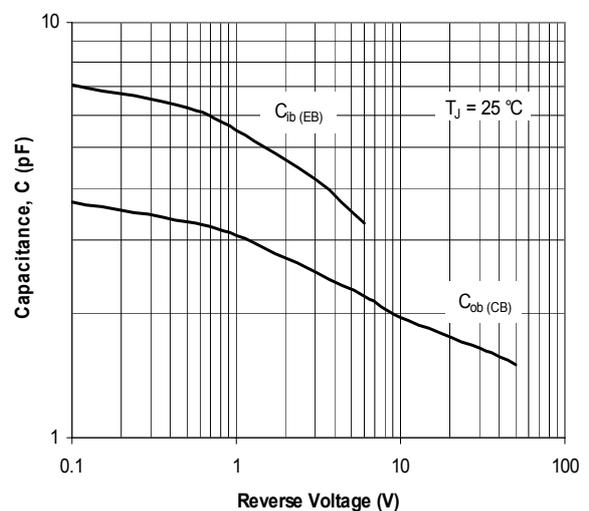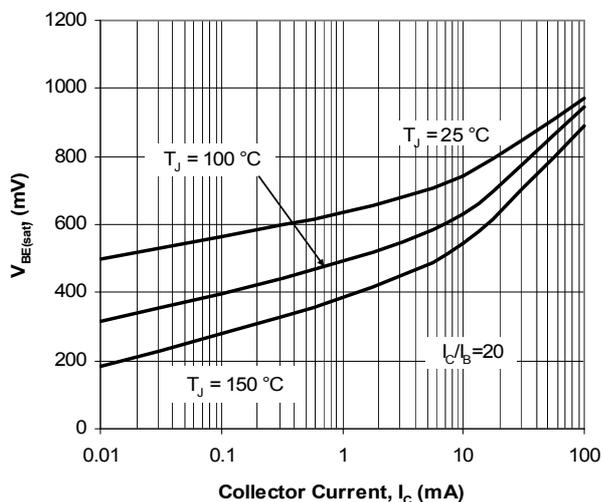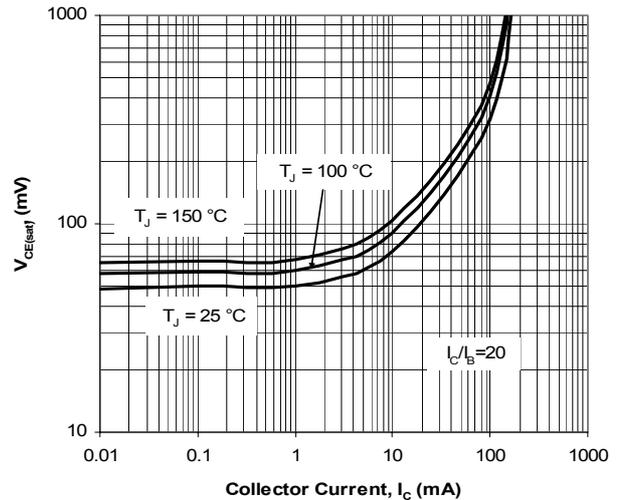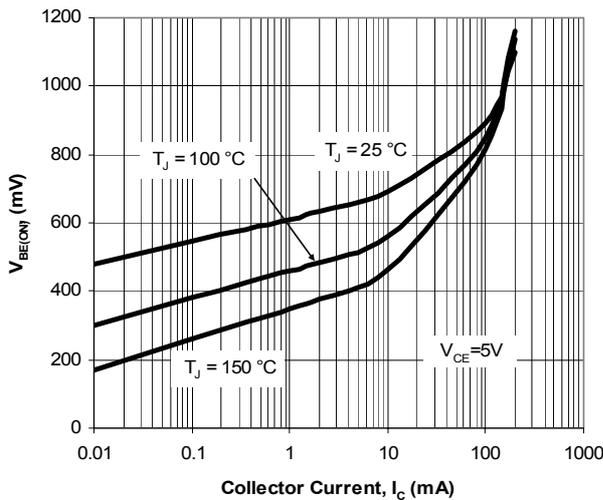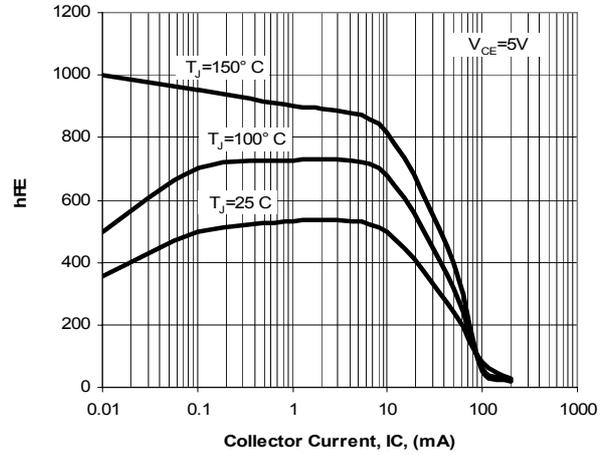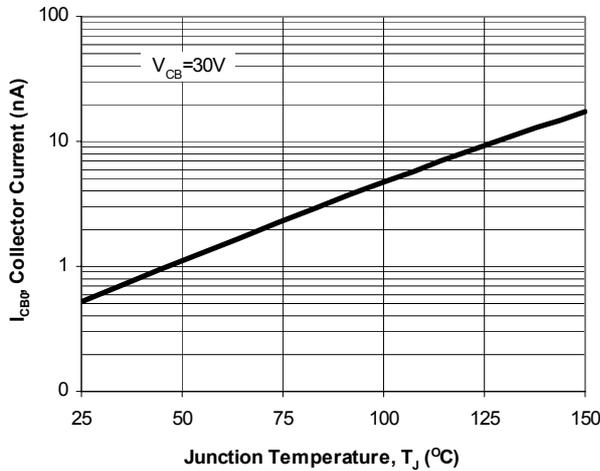


BC846x,BC847x,BC848x,BC849x,BC850x SERIES

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
BC846A	SOT-23	3K pcs / 7" reel	46A
BC846A	SOT-23	12K pcs / 13" reel	46A
BC846B	SOT-23	3K pcs / 7" reel	46B
BC846B	SOT-23	12K pcs / 13" reel	46B
BC847A	SOT-23	3K pcs / 7" reel	47A
BC847A	SOT-23	12K pcs / 13" reel	47A
BC847B	SOT-23	3K pcs / 7" reel	47B
BC847B	SOT-23	12K pcs / 13" reel	47B
BC847C	SOT-23	3K pcs / 7" reel	47C
BC847C	SOT-23	12K pcs / 13" reel	47C
BC848A	SOT-23	3K pcs / 7" reel	48A
BC848A	SOT-23	12K pcs / 13" reel	48A
BC848B	SOT-23	3K pcs / 7" reel	48B
BC848B	SOT-23	12K pcs / 13" reel	48B
BC848C	SOT-23	3K pcs / 7" reel	48C
BC848C	SOT-23	12K pcs / 13" reel	48C
BC849B	SOT-23	3K pcs / 7" reel	49B
BC849B	SOT-23	12K pcs / 13" reel	49B
BC849C	SOT-23	3K pcs / 7" reel	49C
BC849C	SOT-23	12K pcs / 13" reel	49C
BC850B	SOT-23	3K pcs / 7" reel	50B
BC850B	SOT-23	12K pcs / 13" reel	50B
BC850C	SOT-23	3K pcs / 7" reel	50C
BC850C	SOT-23	12K pcs / 13" reel	50C

BC846x,BC847x,BC848x,BC849x,BC850x SERIES

Mounting Pad Layout

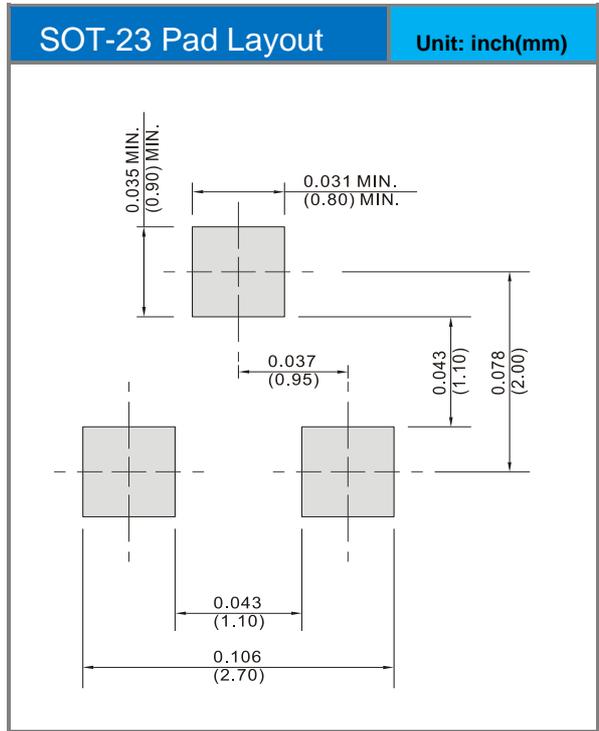

BC846x,BC847x,BC848x,BC849x,BC850x SERIES

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document follow PCN procedure. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.