



LaserLight SMD 1K


LaserLight SMD 1K is the next generation of SLD Laser's high luminance, white laser light emitter in a compact 7mm SMD. Featuring 1000 lumens and 1000 Mcd/m², LaserLight SMD 1K enables ultra-long throw distances, narrow beam angles and small optic sizes for specialty lighting applications.



Lighting design
freedom, unleashed

World's highest luminance
Award-winning technology
Built-in safety features
Narrow beam angles

Brighter. Smaller. Safer.

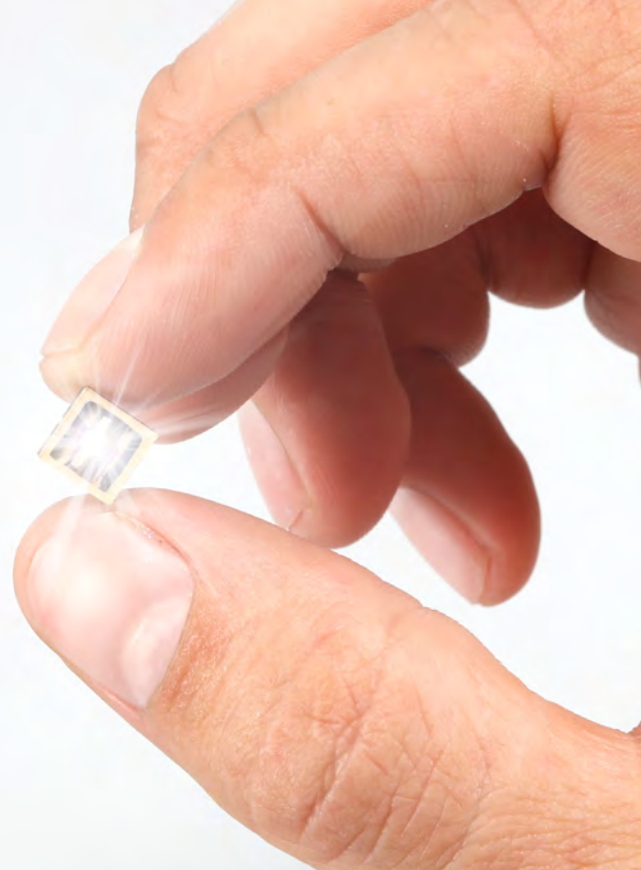

Applications:

Outdoor
Portable
Automotive
Search & Rescue
Security
Medical
Architectural
Entertainment
Many more...

Features:

- » World's highest luminance at 1,000 Mcd/m²
- » Enables less than 3° beam angle from 35mm optic
- » Increased lm/W and operating temperature
- » Compact 7mm SMD with built-in safety features



For more information visit SLDLaser.com



Preliminary
Product
Specifications
Summary

LaserLight SMD 1K

White Light Emitter


910-00010-TR LaserLight SMD 1K
910-00011-IT SMD 1K on Star MCPCB




Product Characteristics

Parameter	Units	Typical Value
Luminous Output	lm	1000
Emitting Region (dia.)	mm	0.5
Luminance	Mcd/m ²	1300
Viewing Angle	degrees	120
Color Temperature (CCT)	K	6000
Color Rendering Index	CRI	70
Forward Current	A	2.50
Forward Voltage	V	9.0
Package Dimensions	mm	7.0 sq x 2.3
Max oper. temp. (case)	°C	60

Spectral Power Distribution

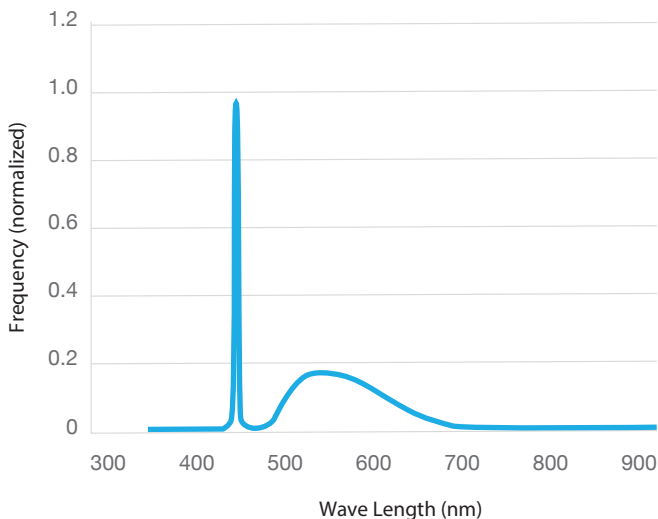

Relative Luminance Capability

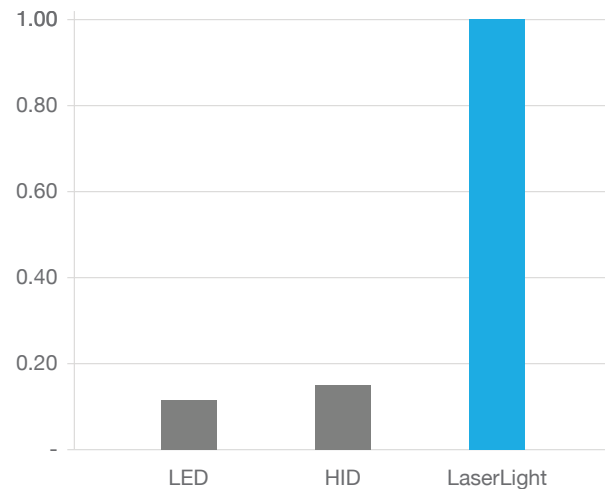

SLDLASER

+1.805.696.6999
info@SLDLaser.com
SLDLaser.com

Pioneering the future of lighting

SLD Laser is commercializing a new generation of visible laser light sources for as well as advanced sensing and LiFi communication applications. SLD Laser's high luminance LaserLight products are UL and IEC safety certified, and the company is certified to automotive IATF 16949 and ISO 9001 quality standards with facilities in Santa Barbara, CA and in Fremont, CA.

Specifications are preliminary. All rights reserved. 1/2021

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kyocera AVX:](#)

[910-00010-WF](#) [910-00011-IT](#)