




Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

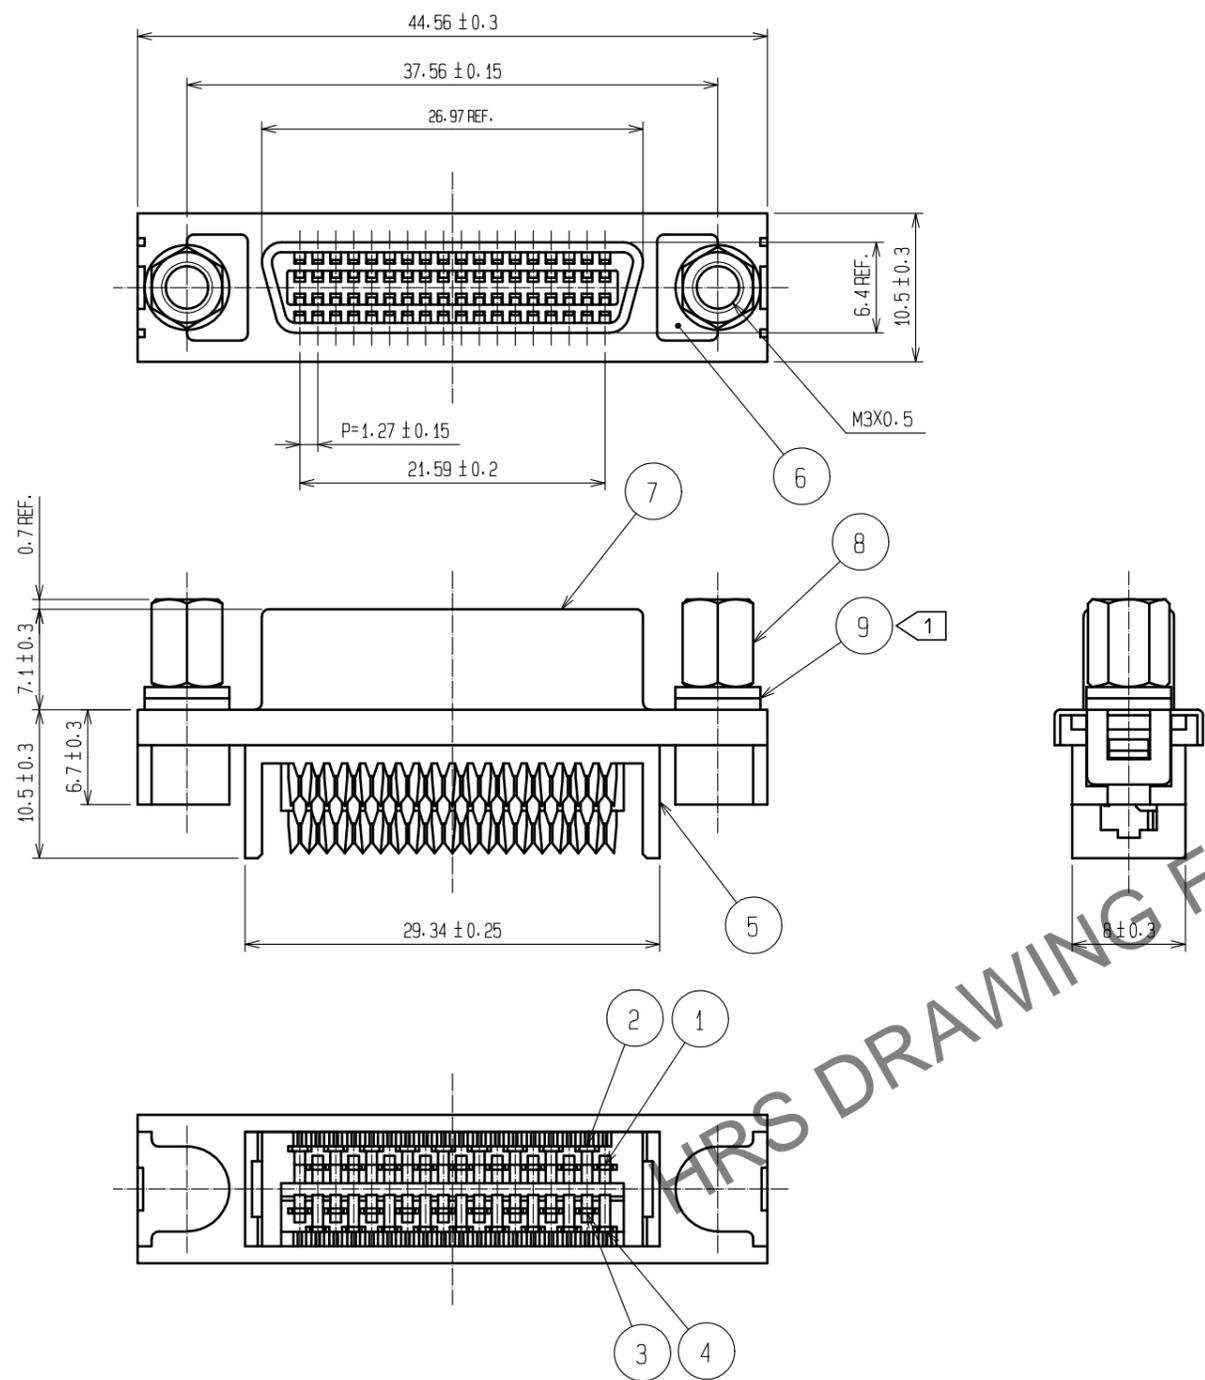


⑩ Attached parts

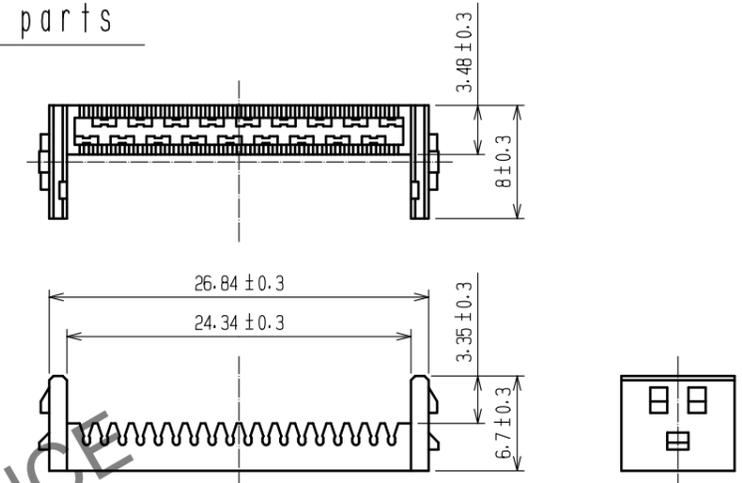

⑪ Attached parts

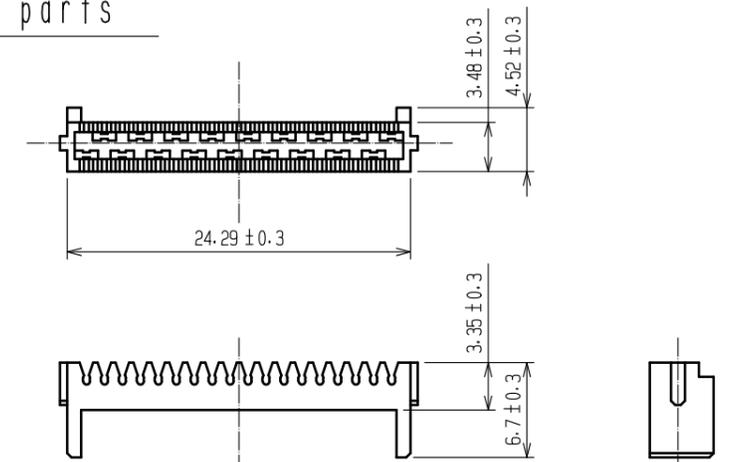

Recommended panel cutout

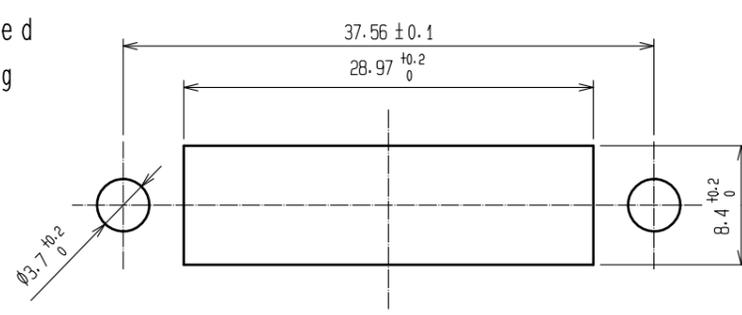

Note ① Part No. ① shall be finished as table shown below according to panel thickness.
 (Washer thickness : 0.8)

Panel thickness	Number of washer
t=0.7~1.0	2 each
t=1.5~1.8	1 each

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
6	Zinc Alloy Die Casting	Nickel plating			
5	PBT	Milky white, UL94V-0	11	PBT	Black, UL94V-0
4	Phosphor Bronze	Selective gold plating 0.2μm	10	PBT	Black, UL94V-0
3	Phosphor Bronze	Selective gold plating 0.2μm	9	Steel	Nickel plating
2	Phosphor Bronze	Selective gold plating 0.2μm	8	Steel	Nickel plating
1	Phosphor Bronze	Selective gold plating 0.2μm	7	Steel	Nickel plating

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				

APPROVED : RI. TAKAYASU	18.05.10	DRAWING NO.	EDC-041618-55-00
CHECKED : AH. KODAMA	18.05.10	PART NO.	DX30A-36S-LNA(55)
DESIGNED : TS. ITO	18.05.09	CODE NO.	CL230-0167-4-55
DRAWN : AK. AKIYAMA	18.05.08		