

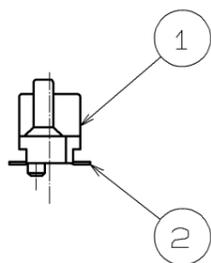
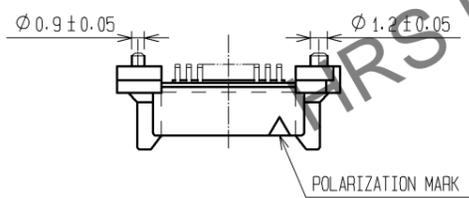
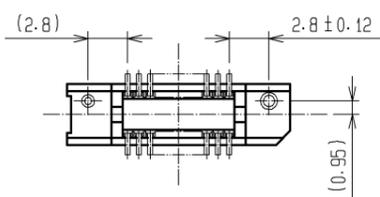
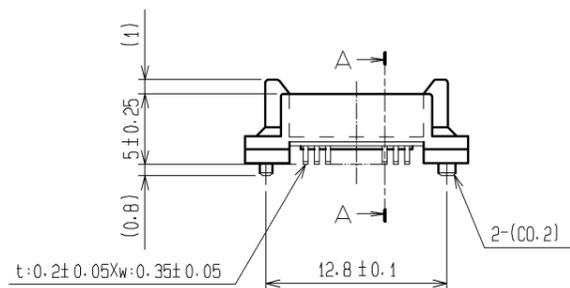


Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

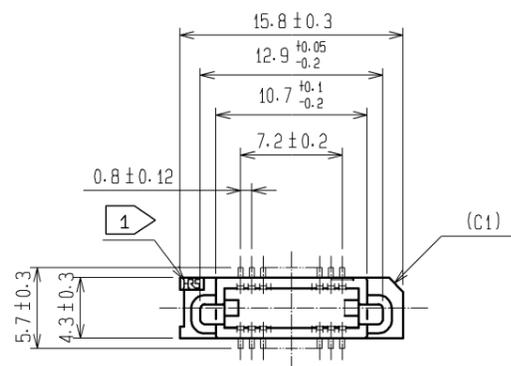


A-A (10:1)

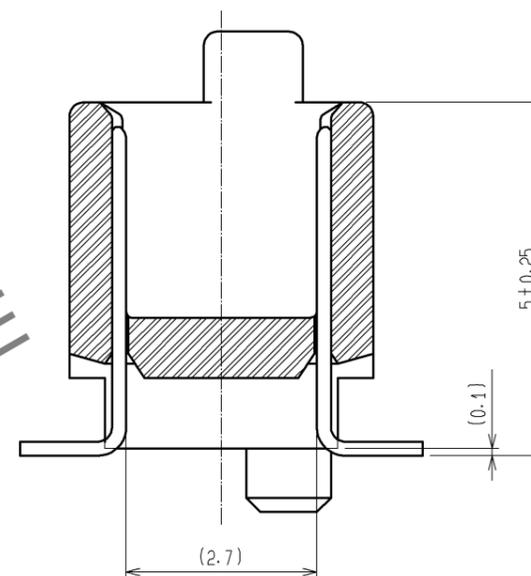


- NOTE
- 1 HRS MARK SHALL BE OPTIONAL.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - 3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 4 PACKING SHALL BE EMBOSSED CARRIER TAPE.
SEE NEXT PAGE FOR DETAILS.
 - 5 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNT SIDE)
(RECOMMENDED METAL MASK THICKNESS: 0.15mm) \triangle

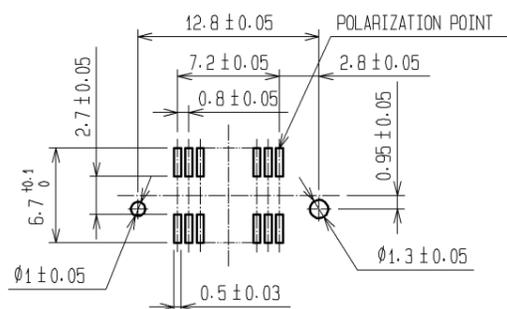

1	POLYPHENYLENE SULFIDE	LIGHT BROWN UL94V-0	4	POLYESTER	COVER TAPE		
			3	POLYSTYRENE	EMBOSSED CARRIER TAPE		
			2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1µm min. LEAD AREA: TIN-PLATING 1µm min. UNDER PLATING: NICKEL 1µm min.		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
UNITS mm	\oplus \triangle	SCALE 2 : 1	COUNT \triangle 3	DESCRIPTION OF REVISIONS DIS-F-006187	DESIGNED Y.J. ASAO	CHECKED HT. YAMAGUCHI	DATE 12.05.11
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	05.08.03	DRAWING NO. EDC3-084963-22			
		CHECKED : HS. OZAWA	05.08.02	PART NO. FX6-20P-0.8SV1(92)			
		DESIGNED : TK. YANAGISAWA	05.08.02	CODE NO. CL576-0021-0-92			
		DRAWN : TK. YANAGISAWA	05.08.02	\triangle 1/1			

Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

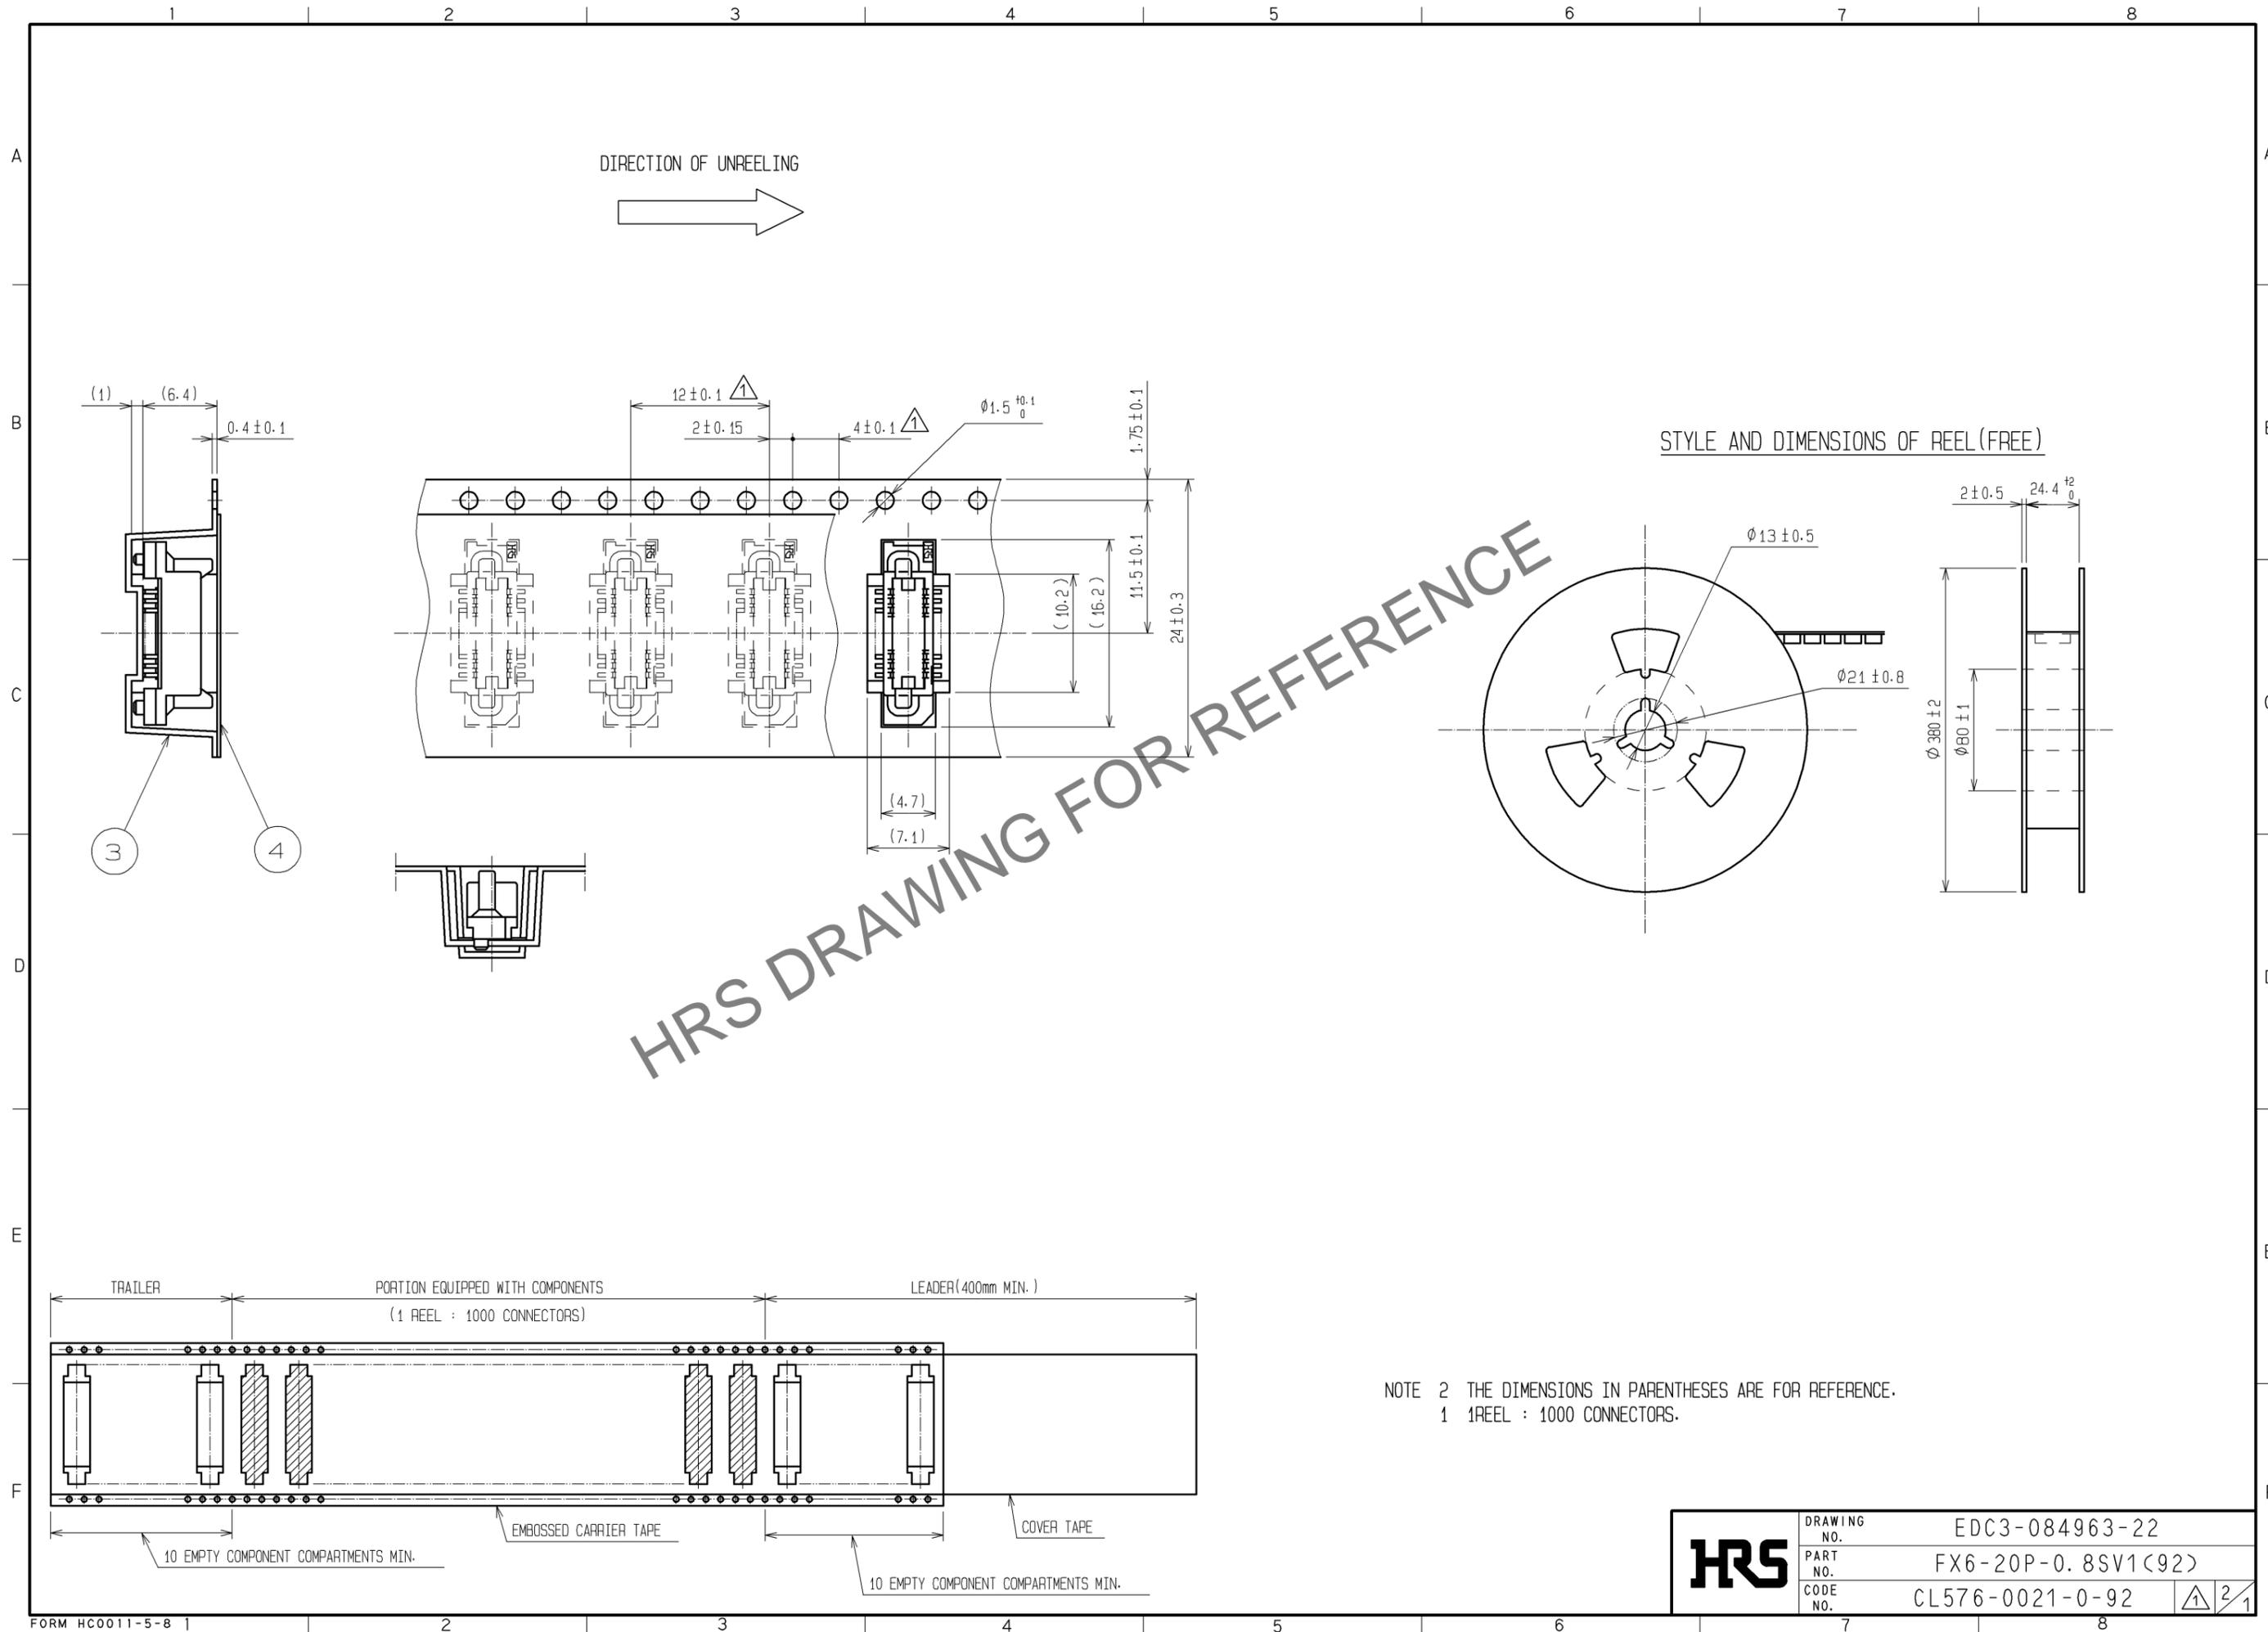

HRS DRAWING FOR REFERENCE

NOTE 2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 1 1REEL : 1000 CONNECTORS.

HRS	DRAWING NO.	EDC3-084963-22
	PART NO.	FX6-20P-0.8SV1(92)
	CODE NO.	CL576-0021-0-92
		2/1