


Jan. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

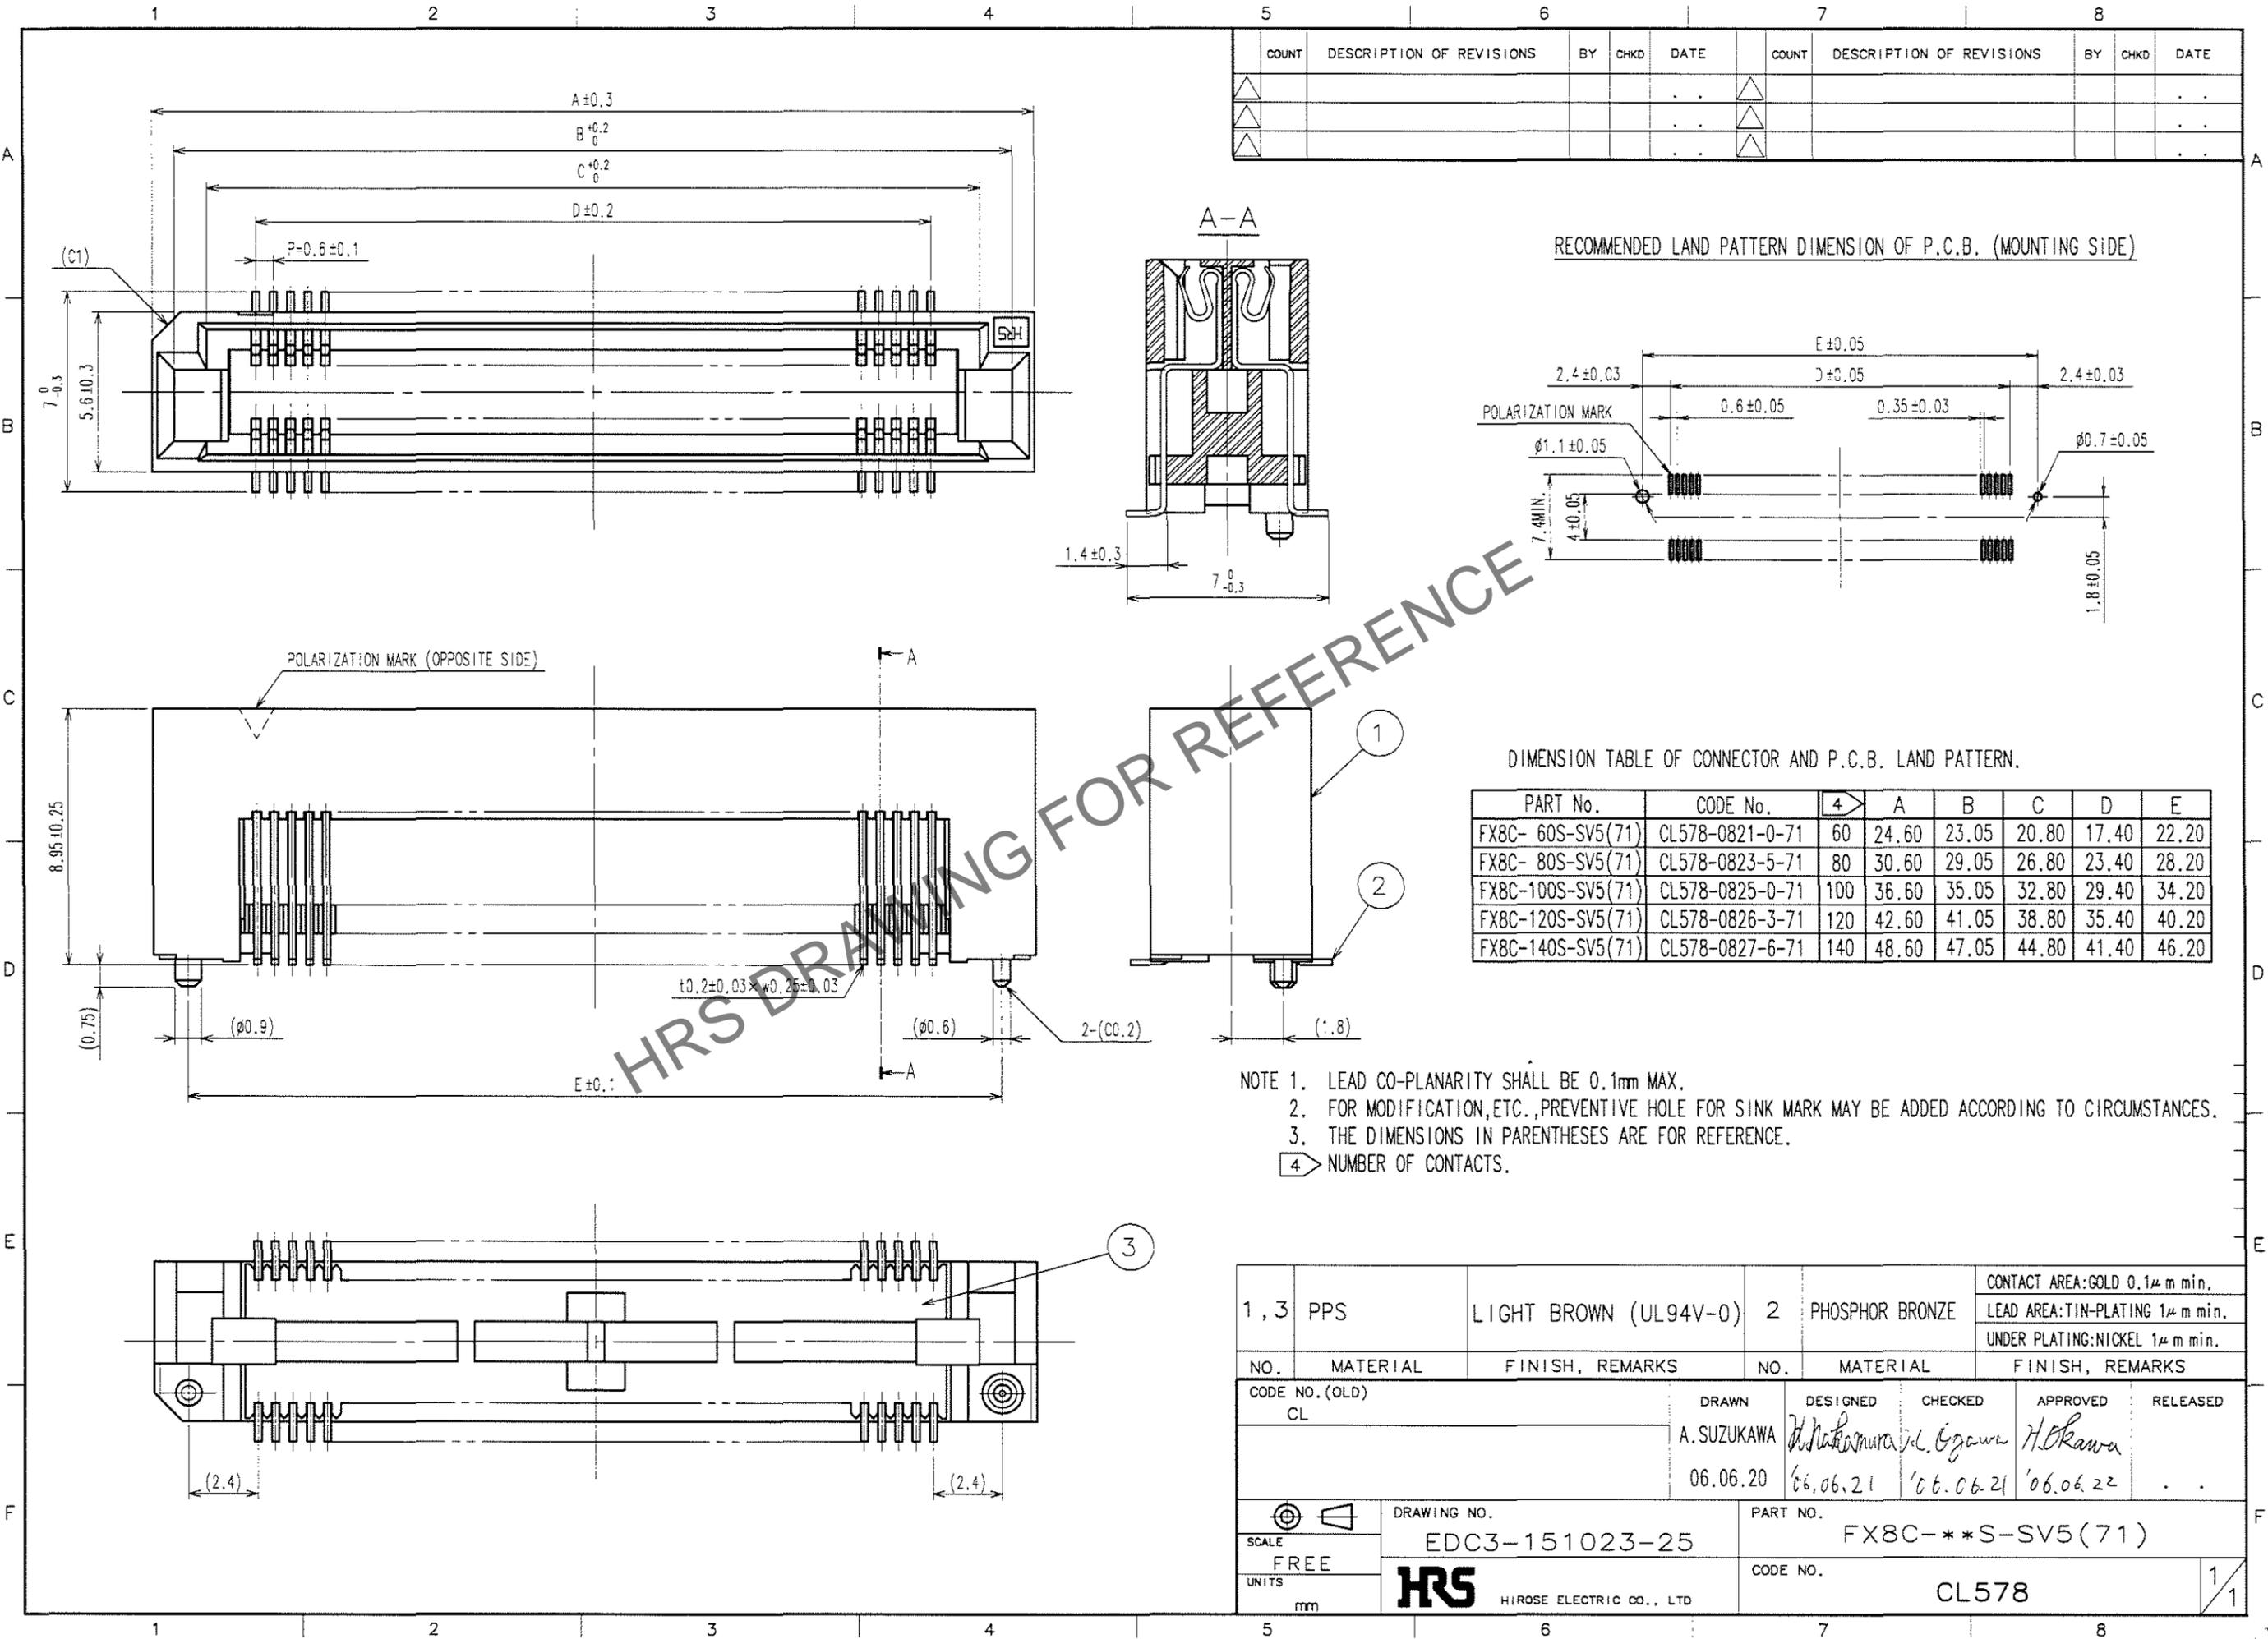

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

DIMENSION TABLE OF CONNECTOR AND P.C.B. LAND PATTERN.

PART No.	CODE No.	4	A	B	C	D	E
FX8C-60S-SV5(71)	CL578-0821-0-71	60	24.60	23.05	20.80	17.40	22.20
FX8C-80S-SV5(71)	CL578-0823-5-71	80	30.60	29.05	26.80	23.40	28.20
FX8C-100S-SV5(71)	CL578-0825-0-71	100	36.60	35.05	32.80	29.40	34.20
FX8C-120S-SV5(71)	CL578-0826-3-71	120	42.60	41.05	38.80	35.40	40.20
FX8C-140S-SV5(71)	CL578-0827-6-71	140	48.60	47.05	44.80	41.40	46.20

1, 3	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min. LEAD AREA: TIN-PLATING 1μm min. UNDER PLATING: NICKEL 1μm min.		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)	CL		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			A. SUZUKAWA	<i>Nakamura</i>	<i>I. Ogawa</i>	<i>H. Okawa</i>	
			06.06.20	06.06.21	06.06.21	06.06.22	
SCALE	FREE	DRAWING NO.	PART NO.				
UNITS	mm	EDC3-151023-25	FX8C-**S-SV5(71)				
		HRS HIROSE ELECTRIC CO., LTD	CODE NO. CL578				

TO
PCK