



ELV. RoHS COMPLIANT

CONNECTOR WITH PICK & PUT COVER (2:1)

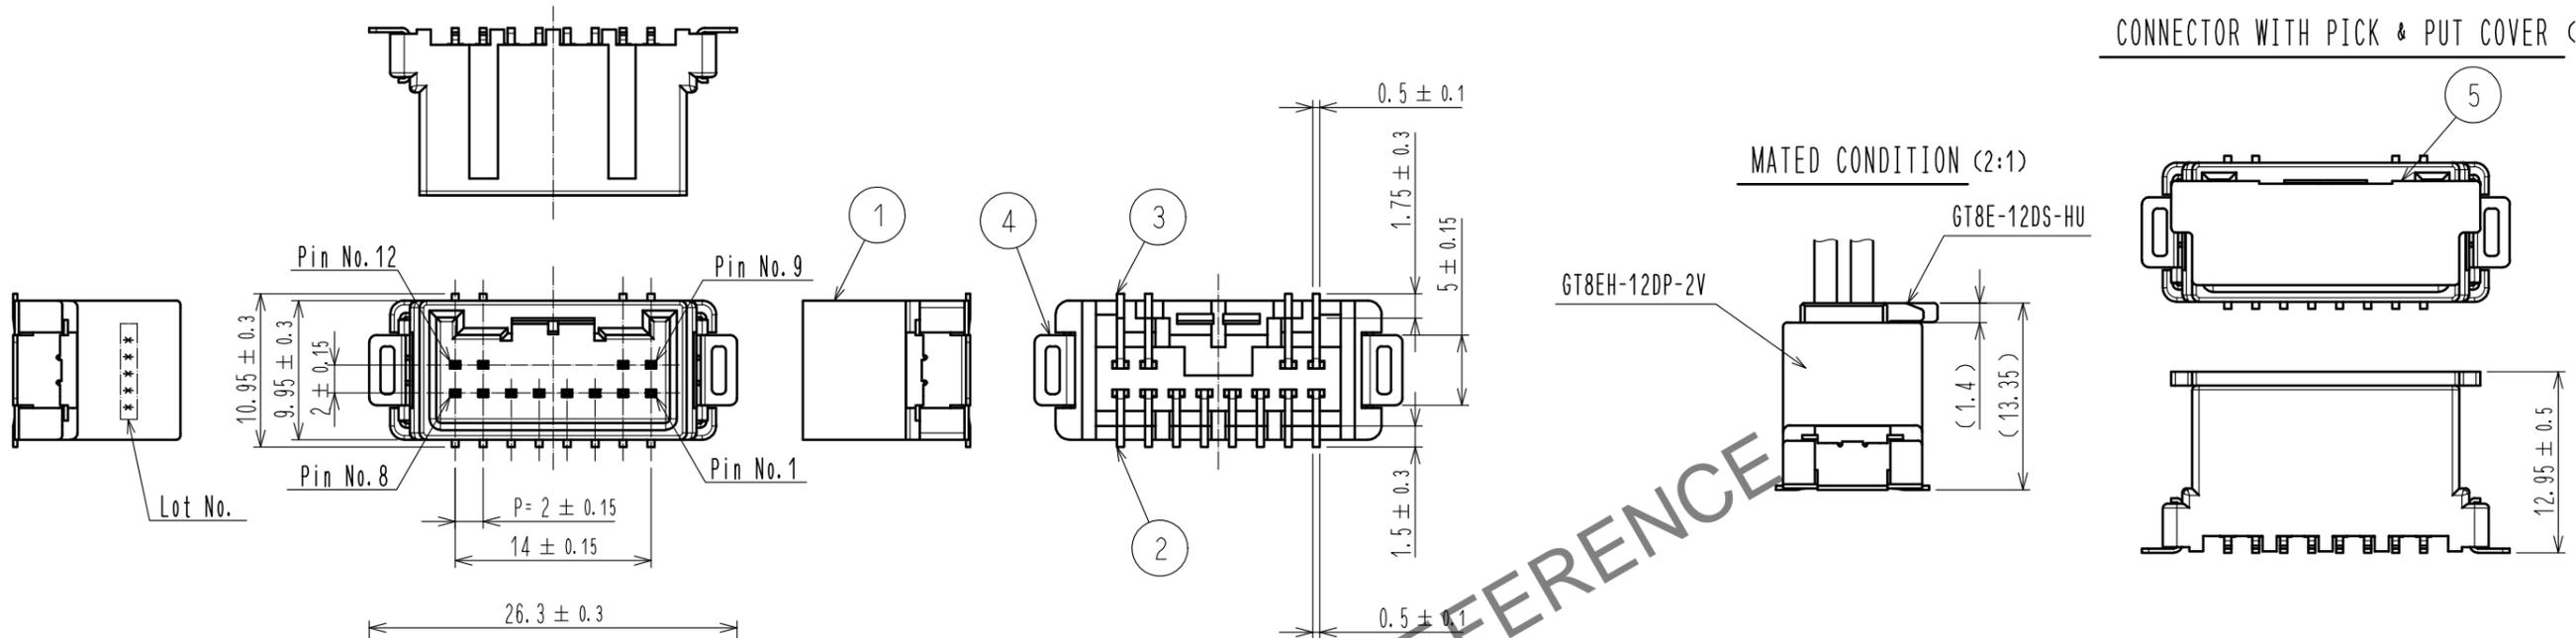


RECOMMENDED PC BOARD PATTERN (2:1)

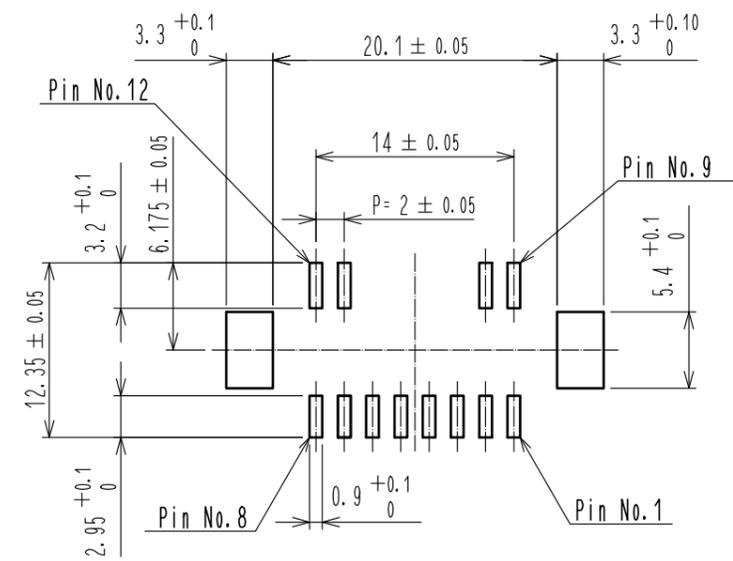

NOTE

- RECOMMENDED TEMPERATURE PROFILE FOR REFLOW (REFER TO RIGHT FIG.)
 REFLOW HEATING: FAR-INFLARED, IN THE AIR OR NITROGEN
 REFLOW No.: MAX 2 TIMES
 PEAK TEMPERATURE: 250°C
 ABOVE 230°C: 20~40s
 PREHEAT: 150~180°C (60~120s)
- SOLDERING TEMPERATURE: 280~300°C (MAX 2s)
- COPLANARITY OF LEADS SHALL BE UNDER 0.1mm.
- RECOMMENDED THICKNESS FOR PC BOARD IS 1.6mm.
- RECOMMENDED THICKNESS FOR SOLDER PASTE IS 0.15mm.

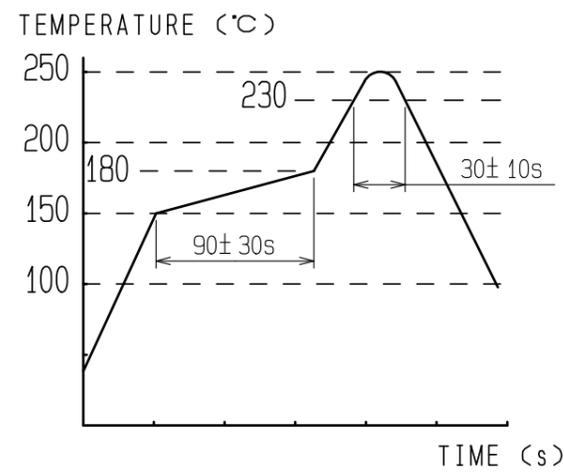

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
4	BRASS	TIN PLATING OVER NICKEL PLATING		8	PS		REEL
3	BRASS	TIN PLATING OVER NICKEL PLATING		7	PET		COVER TAPE
2	BRASS	TIN PLATING OVER NICKEL PLATING		6	PS		EMBOSSED CARRIER TAPE
1	PPS	BLACK UL94V-0		5	PA		MILKEY WHITE

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				


APPROVED	20200321	DRAWING NO.	EDC-169118-58-00
HH. TSUKUMO		PART NO.	GT8EH-12DP-2V(58)
HH. TSUKUMO	20200321	CODE NO.	CL758-1019-9-58
DONGCHAN KIM	20200320		
YK. MITSUISHI	20200318		

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved. In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


PACKAGING SPECIFICATION

EMBOSSED CARRIER TAPE DIMENSION (2:1)

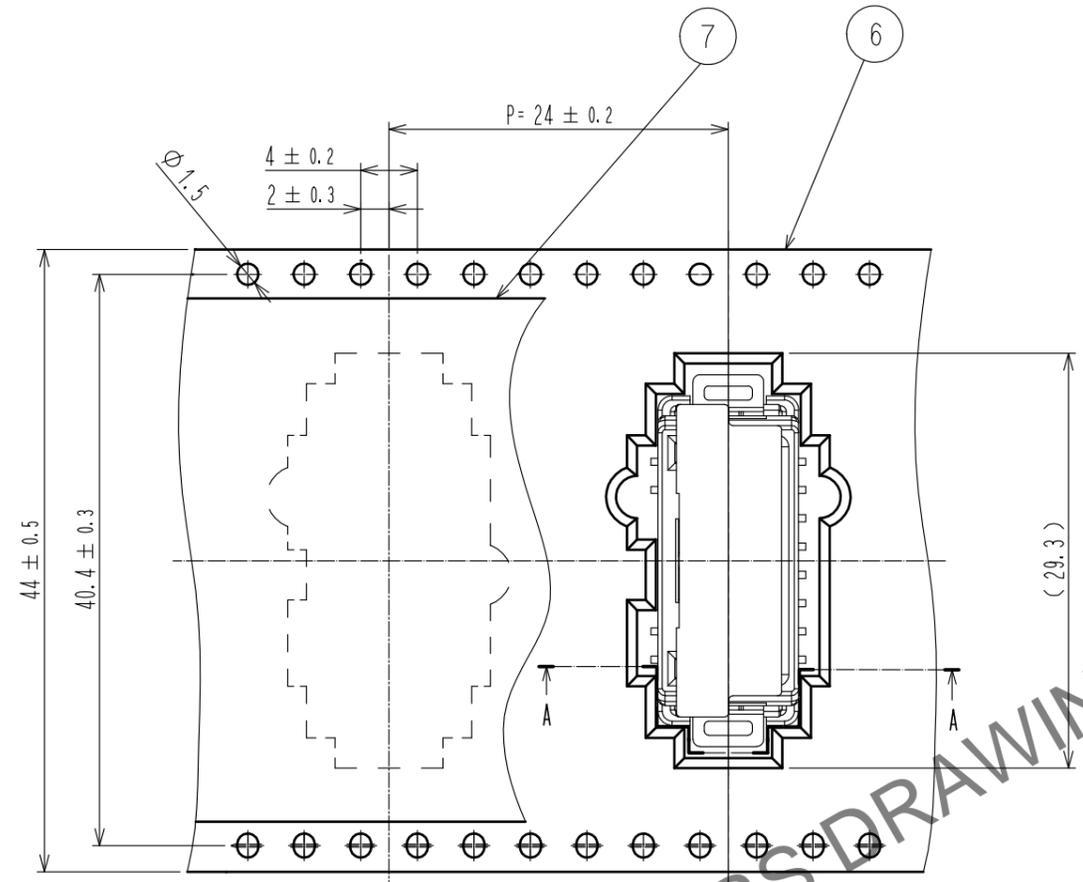


→
DIRECTION OF UNREELING


A-A (2:1)

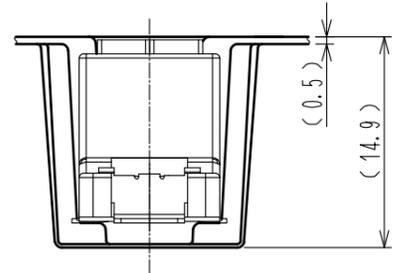

REEL, LEADER AND TRAILER DIMENSION (FREE)

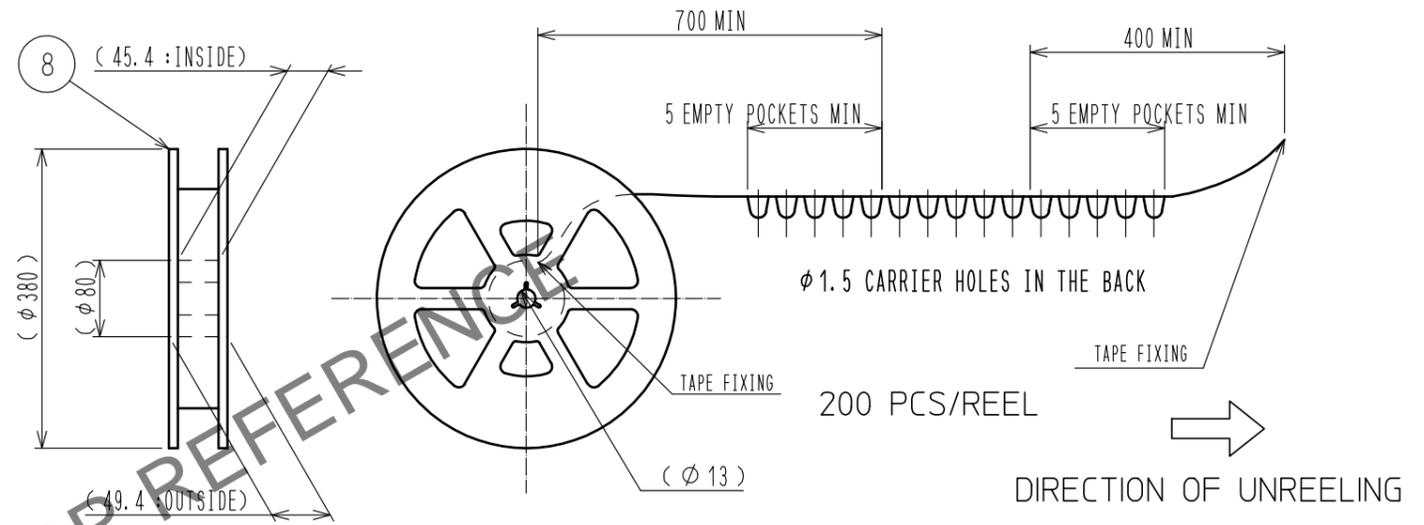

CARDBOARD BOX SIZE (FREE)

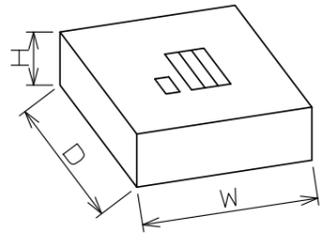

W = (405) (mm)
 D = (405) (mm)
 H = (51) (mm)

HRS	DRAWING NO.	EDC-169118-58-00	2/2
	PART NO.	GT8EH-12DP-2V(58)	
	CODE NO.	CL758-1019-9-58	