


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

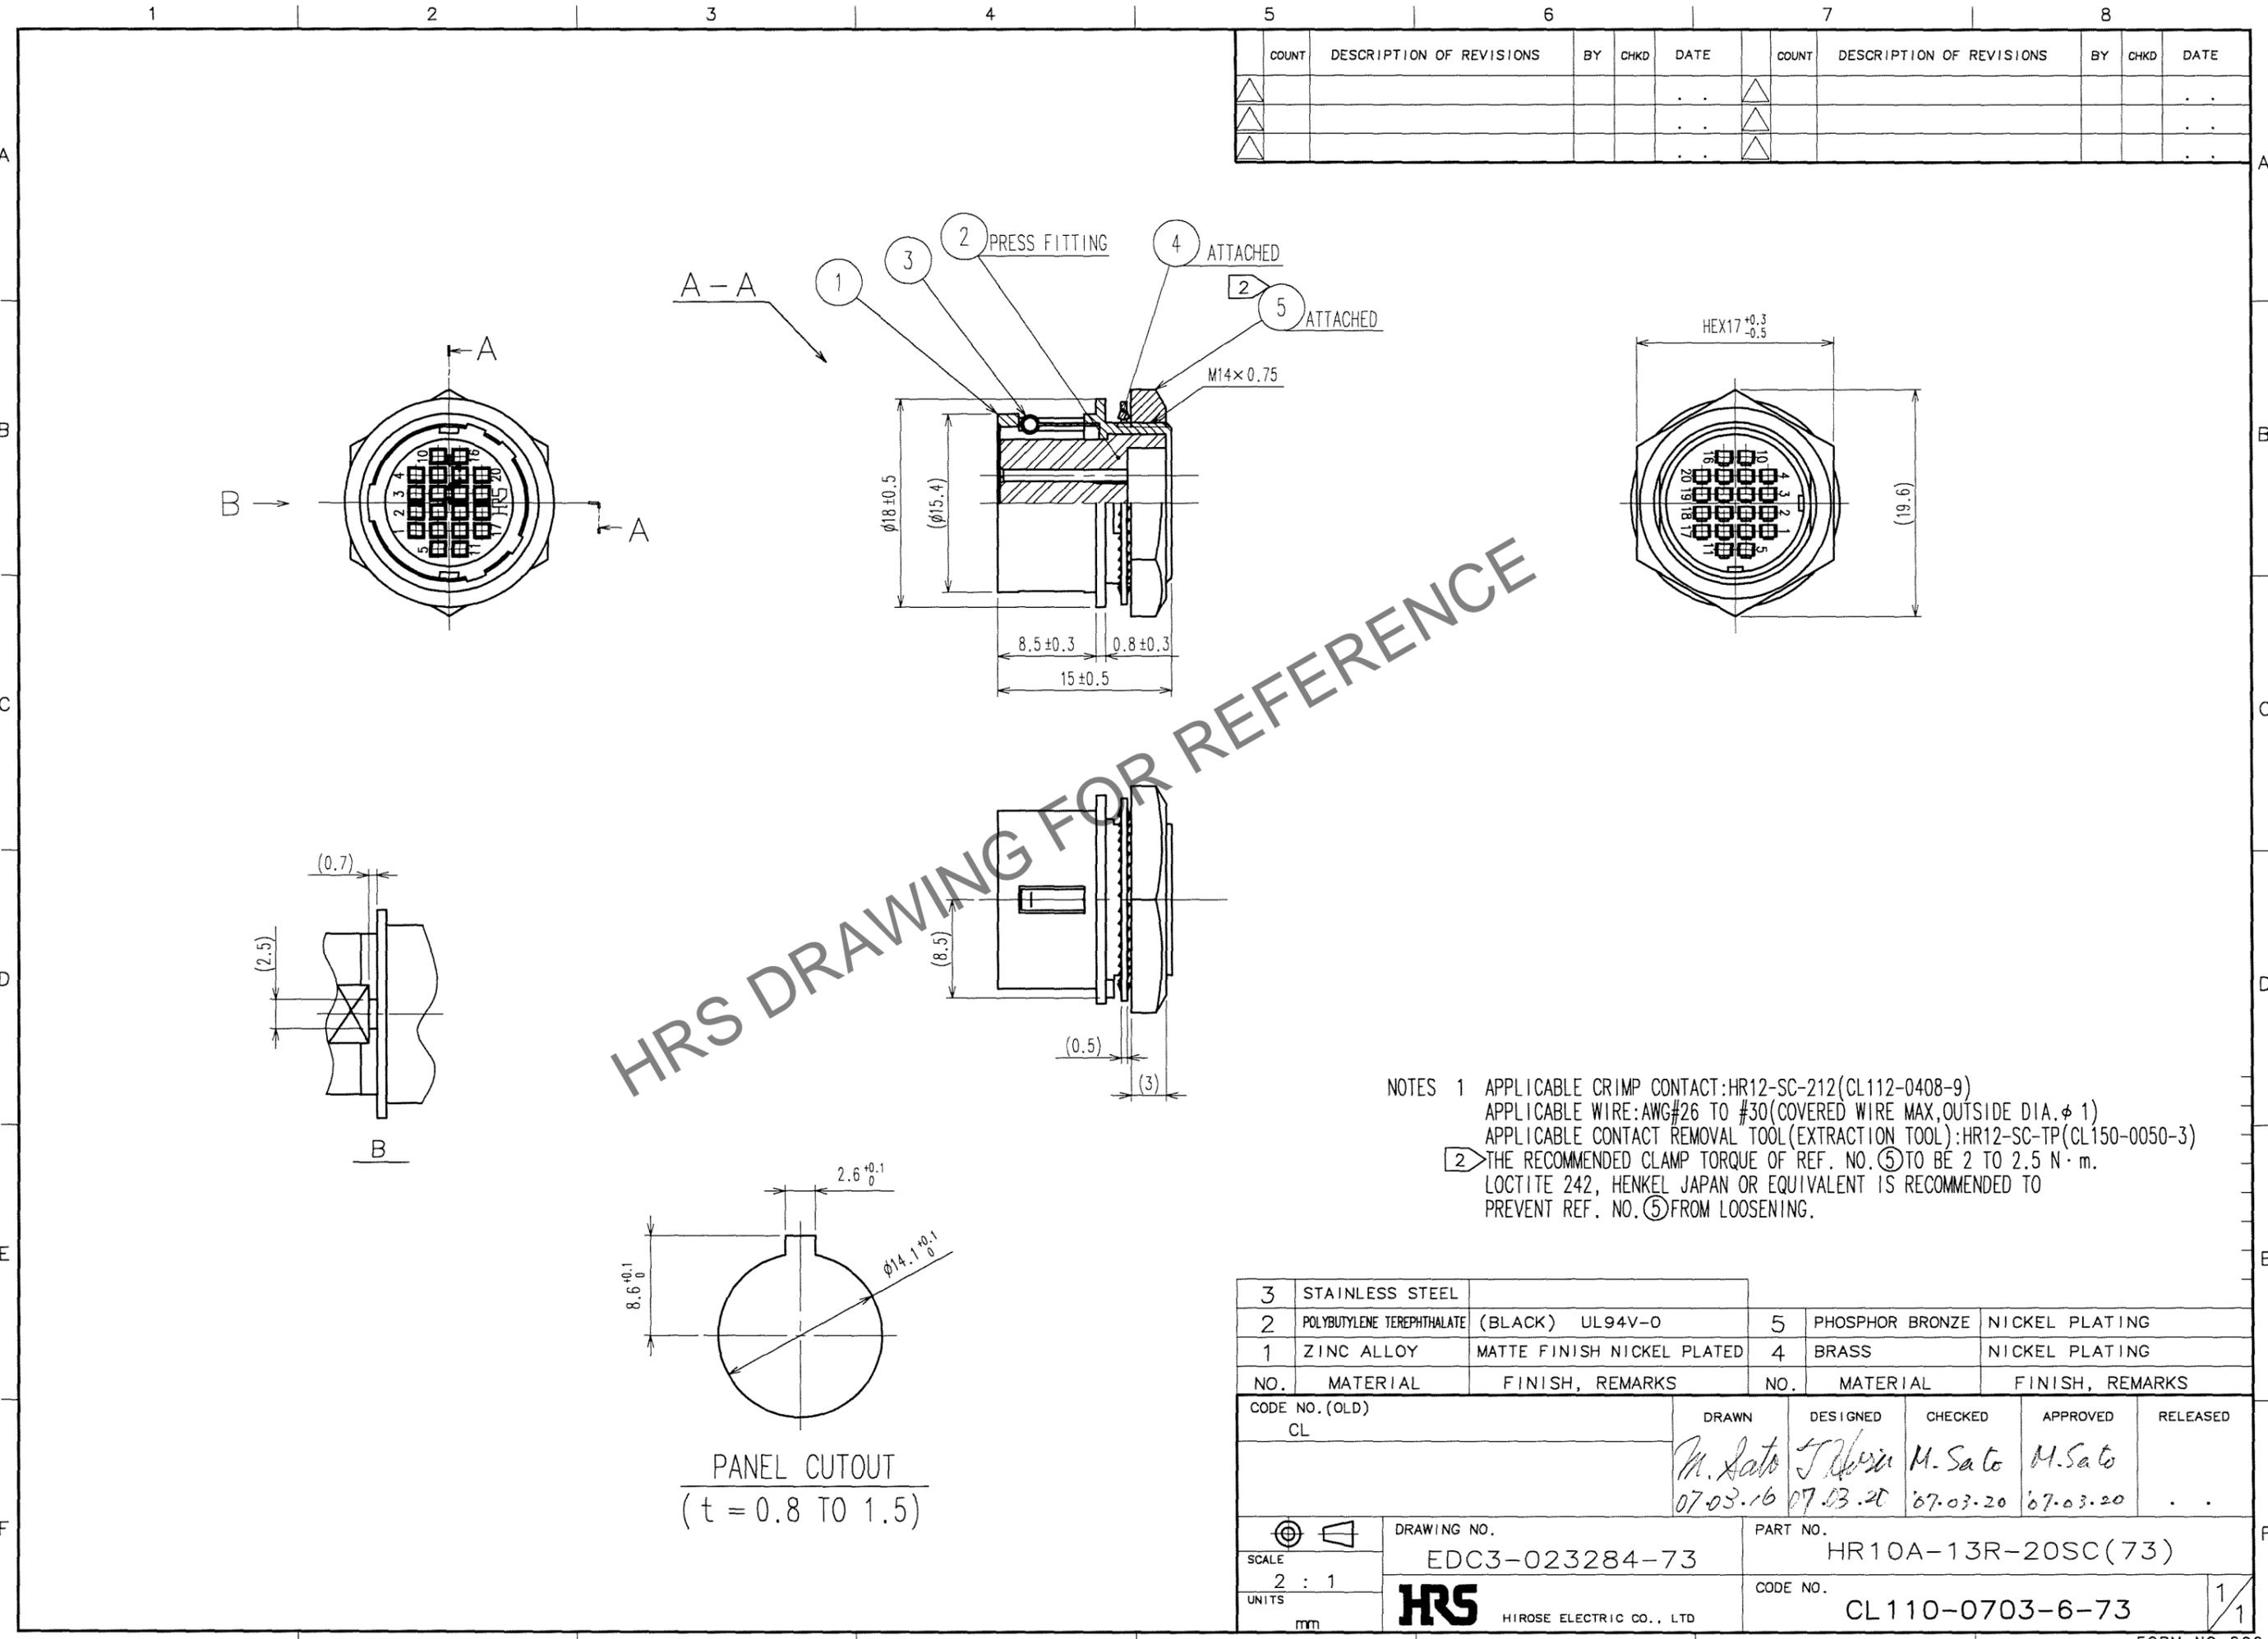

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

HRS DRAWING FOR REFERENCE

NOTES 1 APPLICABLE CRIMP CONTACT:HR12-SC-212(CL112-0408-9)  
 APPLICABLE WIRE:AWG#26 TO #30(COVERED WIRE MAX,OUTSIDE DIA.φ 1)  
 APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL):HR12-SC-TP(CL150-0050-3)  
 2 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑤ TO BE 2 TO 2.5 N·m.  
 LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ⑤ FROM LOOSENING.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
2	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	4	BRASS	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED			

CODE NO. (OLD) CL	DRAWN <i>M. Sato</i> 07.03.16	DESIGNED <i>T. Hori</i> 07.03.20	CHECKED <i>M. Sato</i> 07.03.20	APPROVED <i>M. Sato</i> 07.03.20	RELEASED ..
DRAWING NO. EDC3-023284-73		PART NO. HR10A-13R-20SC(73)			
SCALE 2 : 1		UNITS mm		CODE NO. CL110-0703-6-73	

TO
R