


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

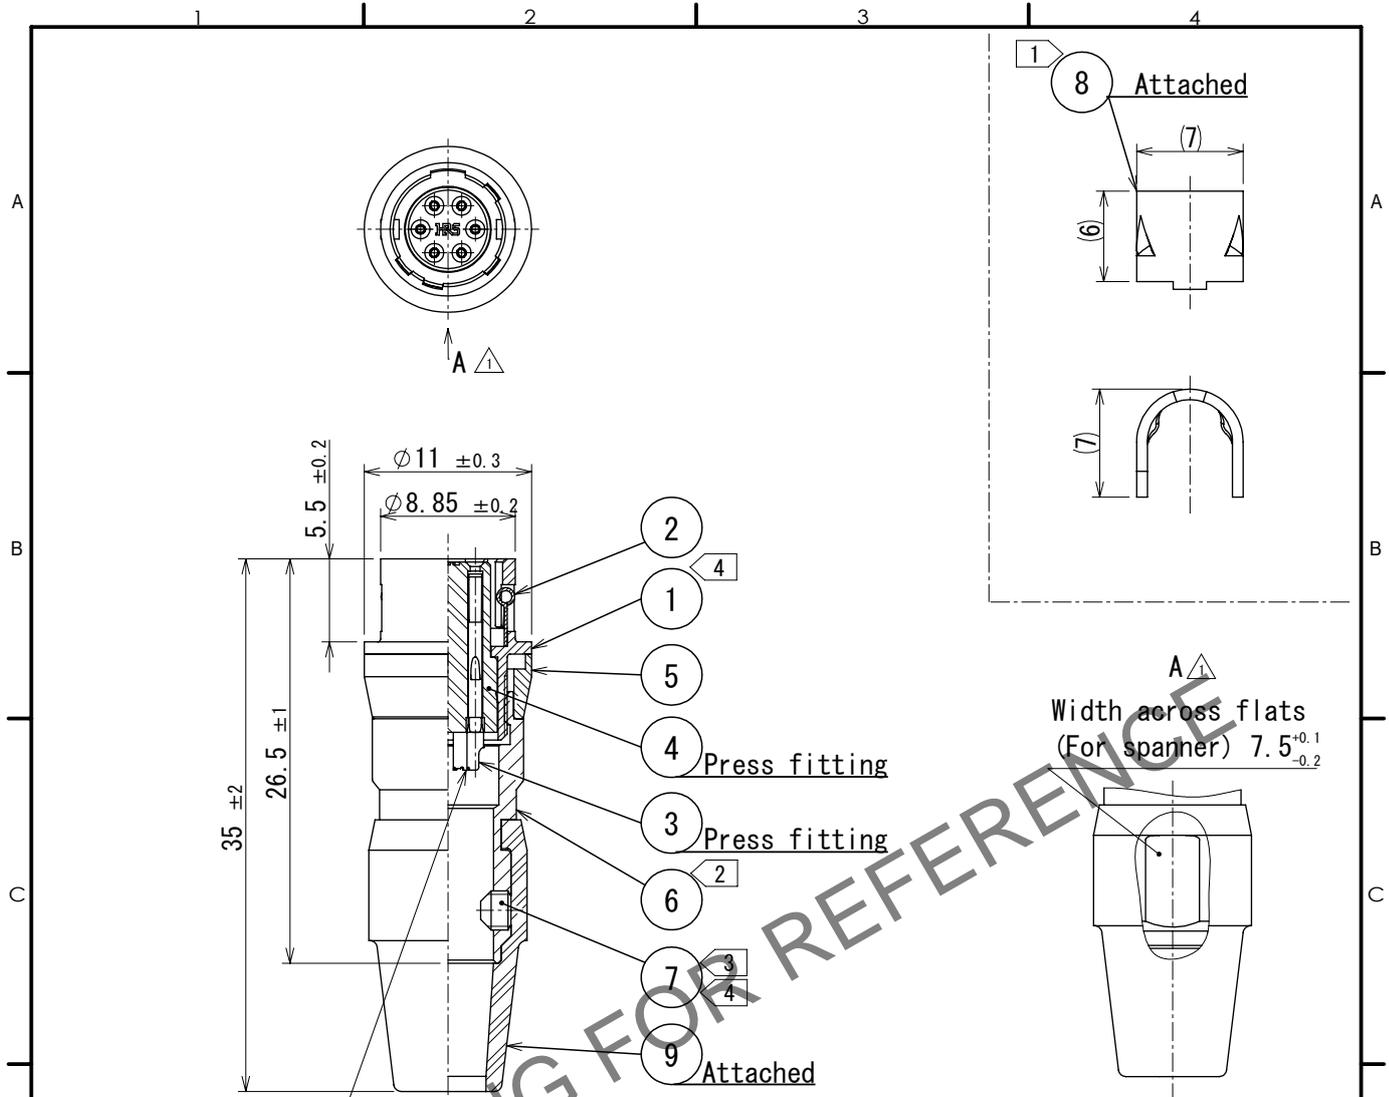

- Notes
- ① Hand crimping tool. Ref No. ⑧ : HR10A-TC-02 (GL150-0041-2)
The hole diameter for crimping: $\phi 5.3$
 - ② The recommended clamp torque, Ref.No. ⑥ : 1.5 to 2 N · m.
 - ③ Across flats hexagon head of Ref.No. ⑦ : 1.27
The recommend clamp torque, Ref.No. ⑦ : 0.3 to 0.4 N · m.
 - ④ Loctite 243, Henkel Japan or equivalent apply to prevent Ref.No. ① and ⑦ for loosening.
 - ⑤ One example of the rotation of Ref.No. ⑥ to Ref.No. ① is shown.

△ CAD change

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
5	Brass	Matte finish nickel plated					
4	Polyamide	(Black) UL94V-0		9	Chloroprene rubber	(Black)	
3	Phosphor bronze	Silver plating 2 μ m min.		8	Brass		
2	Stainless steel			7	Steel	Nickel plating	Hexagon socket set Screw M2.6 × 0.45 × 2
1	Zinc alloy	Matte finish nickel plated		6	Brass	Matte finish nickel plated	

UNITS mm 	SCALE 2:1 	COUNT 4 DESCRIPTION OF REVISIONS DIS-C-00019454	DESIGNED	CHECKED	DATE
			HY. KISHI	HY. KOBAYASHI	2025. 03. 04
HIROSE ELECTRIC CO., LTD.	APPROVED : MO. SATOH	2005. 10. 20	DRAWING NO. EDC-020544-73-73		
	CHECKED : E.J. KUNII	2005. 10. 20	PART NO. HR10A-7J-6S (73)		
	DESIGNED : DS. MATSUNE	2005. 10. 19	CODE NO. CL0110-0311-6-73		
	DRAWN : DS. MATSUNE	2005. 10. 19			