


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

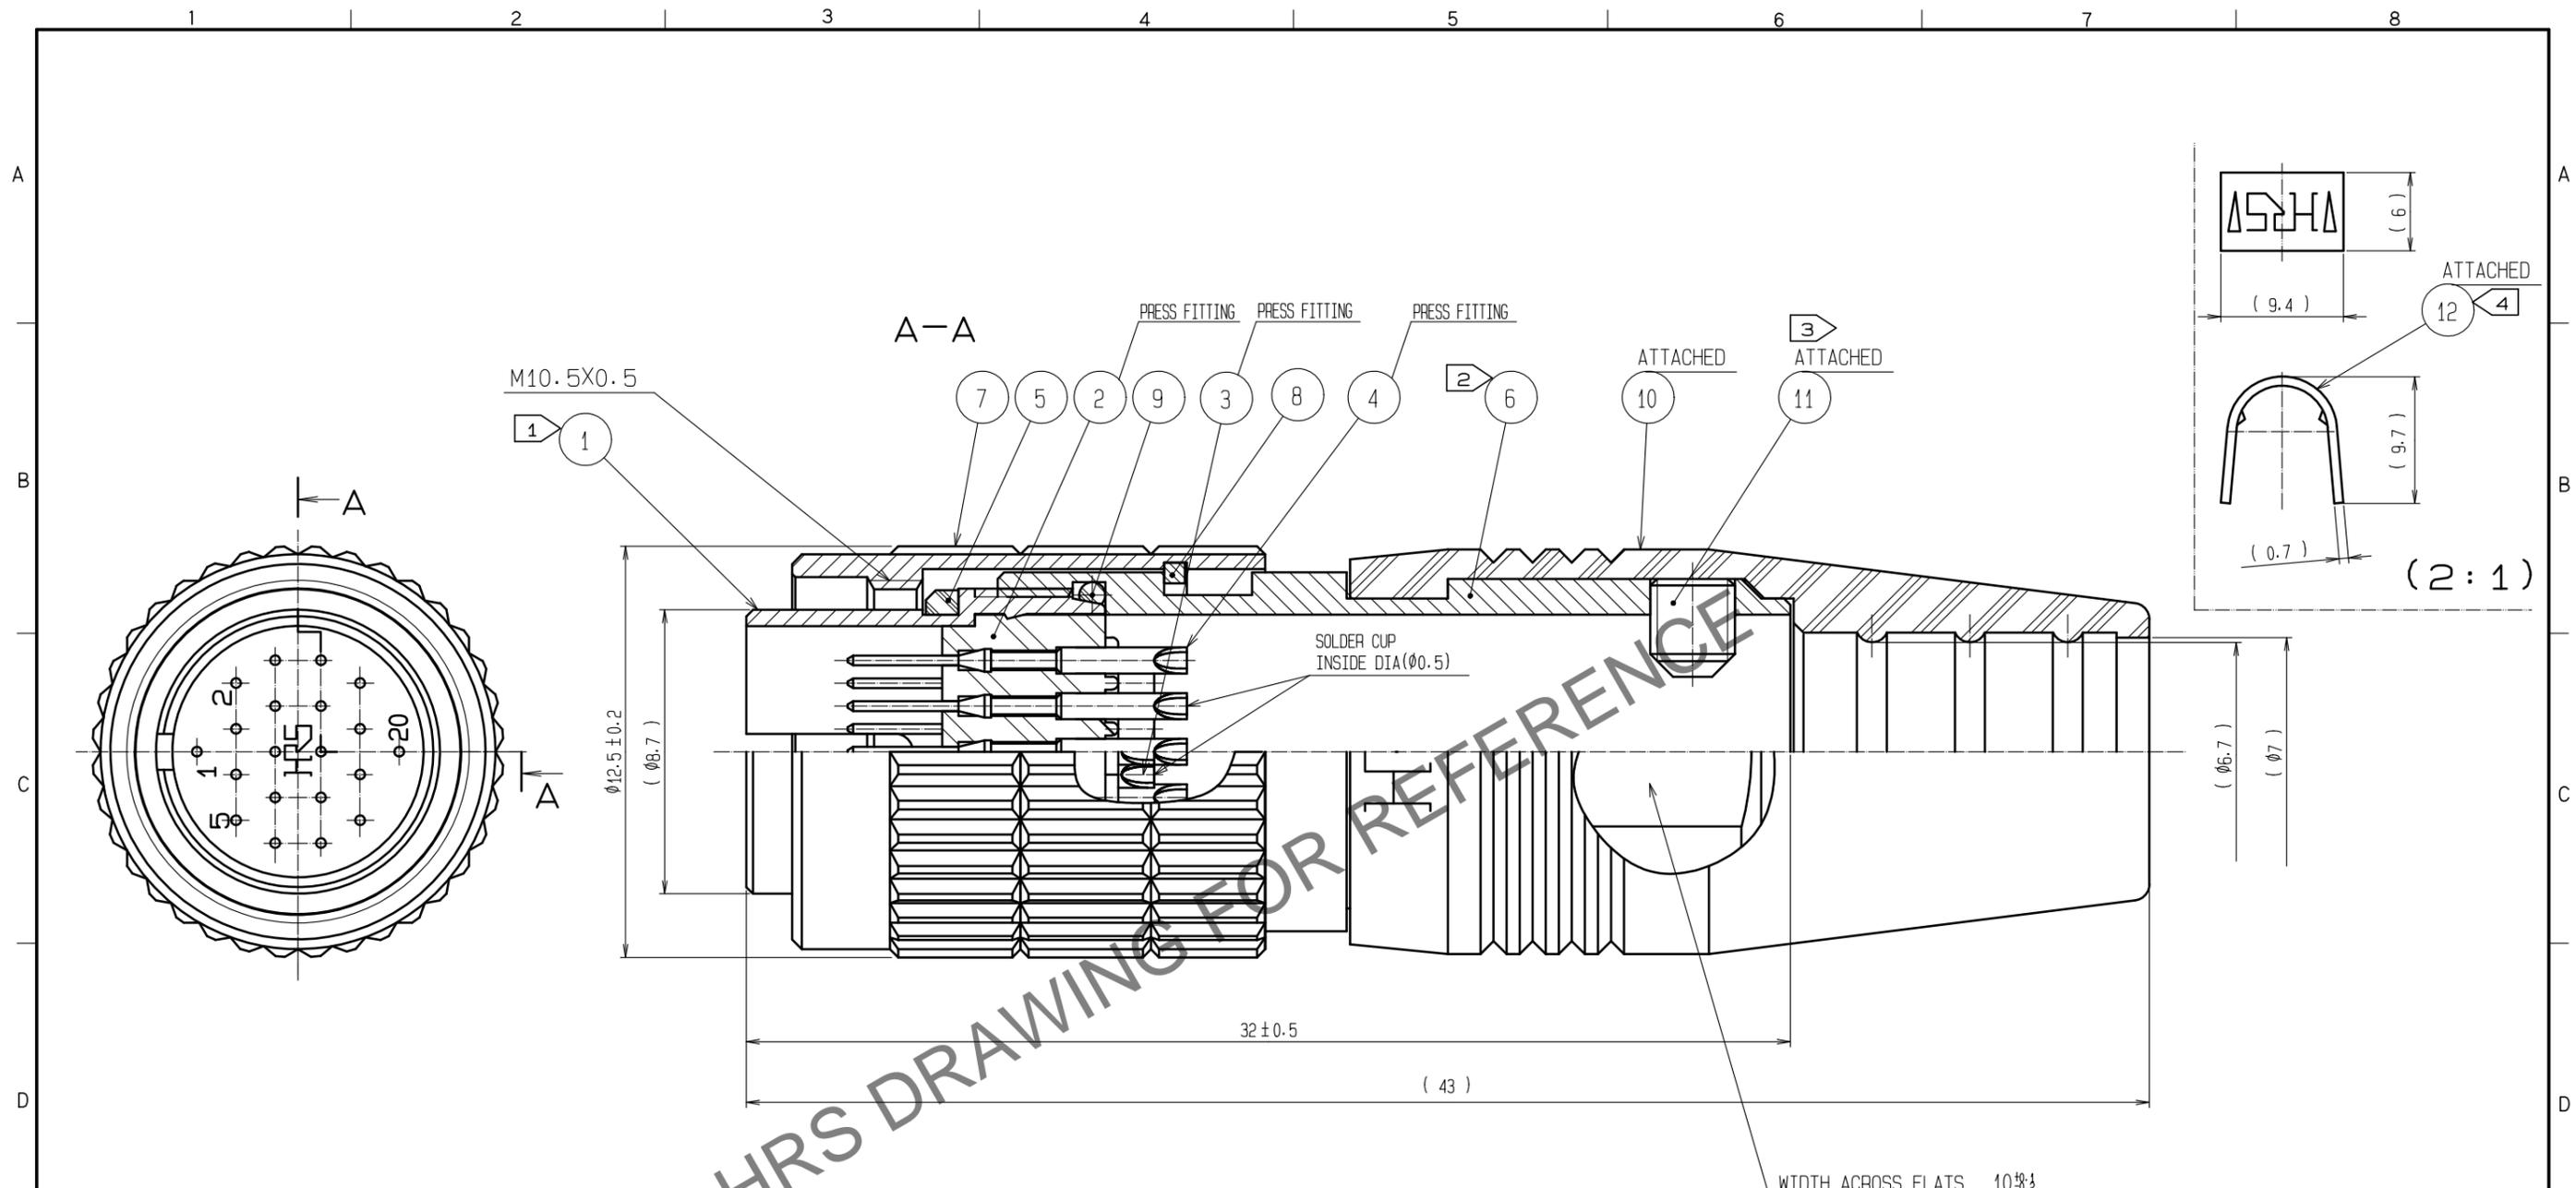

- NOTES
- ① THREAD PORTION OF REF.NO. ① IS APPLIED WITH PRECOATING TO PREVENT LOOSENESS. HOWEVER, THE ADHESIVE EFFECTIVENESS IS DECREASED WHEN REUSED.
  - △ THEREFORE, TREAD PORTION APPLIES TO COAT WITH LOCTITE 263 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT.
  - ② THE RECOMMENDED TIGHTENING TORQUE OF REF NO. ⑥ TO BE 1 N·m.
  - ③ THE TIP OF REF.NO. ⑪ SHALL BE FIXED TO THE CONCAVE PORTION WITH REF.NO. ⑫ CLAMPED TO THE CABLE. OPPOSITE SIDE DIMENSION OF A HEXAGON SOCKET OF REF.NO. ⑪ IS 1.27mm. AND THE RECOMMENDED TIGHTENING TORQUE OF REF.NO. ⑪ TO BE 0.3 TO 0.4 N·m.
  - ④ MANUAL CRIMPING TOOL OF REF.NO. ⑫ : HR10A-TC-02 (THE HOLE DIAMETER FOR CRIMPING :  $\phi 7$ )
  - ⑤ ROTATION EXAMPLES OF REF.NO. ① AND ⑥ ARE SHOWN.
  - ⑥ OVER PLATING : GOLD 0.2 $\mu$ m min.  
UNDER PLATING : NICKEL 2 $\mu$ m min.
  - △ 7 THE ASSEMBLY THIS PRODUCT APPLIES TO THE MANUAL ETAD-C0361-00.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
6	BRASS	NICKEL PLATING	12	BRASS	
5	EPDM	(BLACK)	11	STEEL	NICKEL PLATING M2. 6X0.45X3
4	PHOSPHOR BRONZE	⑥	10	EPDM	(BLACK)
3	PHOSPHOR BRONZE	⑥	9	EPDM	(BLACK)
2	PPS	(BLACK) UL94V-0	8	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	7	BRASS	NICKEL PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	2	DIS-C-00016972	HT. ZENBA	EJ. KUNII	20240229

APPROVED : MR. YOSHIDA	20050105	DRAWING NO.	EDC3-047206-72
CHECKED : MO. SATOH	20050105	PART NO.	HR25-9TP-20P(72)
DESIGNED : YH. YAMADA	20050105	CODE NO.	CL0125-0105-3-72
DRAWN : YH. YAMADA	20050105		